


DRILL HEADS & TAPPER HEADS



DRILL HEADS & TAPPER HEADS

Sugino Drill and Tapper Heads ideal for high speed and high efficient drilling and tapping

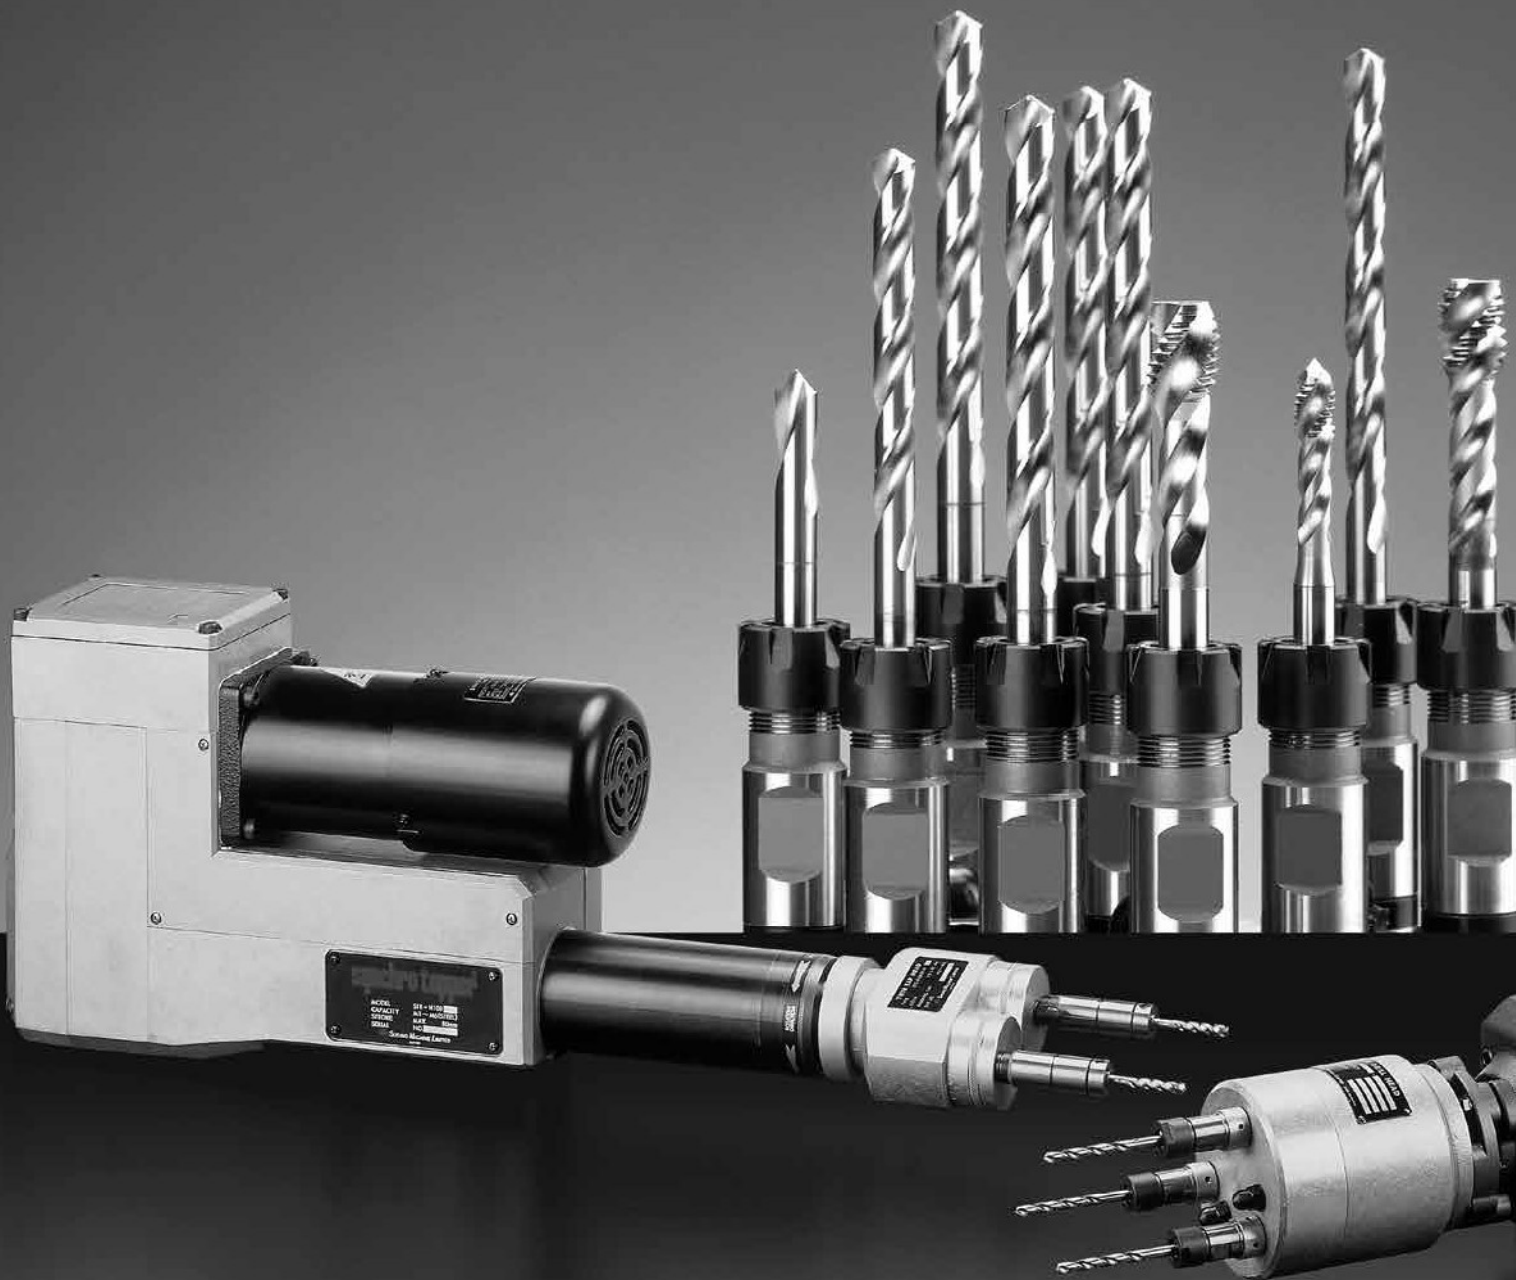


Features of Drill Heads and Tapper Heads

1 Conforming with customer's needs

Meeting customer requirements,
such as Specific Center Distances,
Quantity of Spindles per job,
Spindle length and types or capacities

2 High Accuracy and High Rigidity

Taper Collet adapted for connection with Selffeeders
(for flange type head).
Excellent rigidity and durability provided

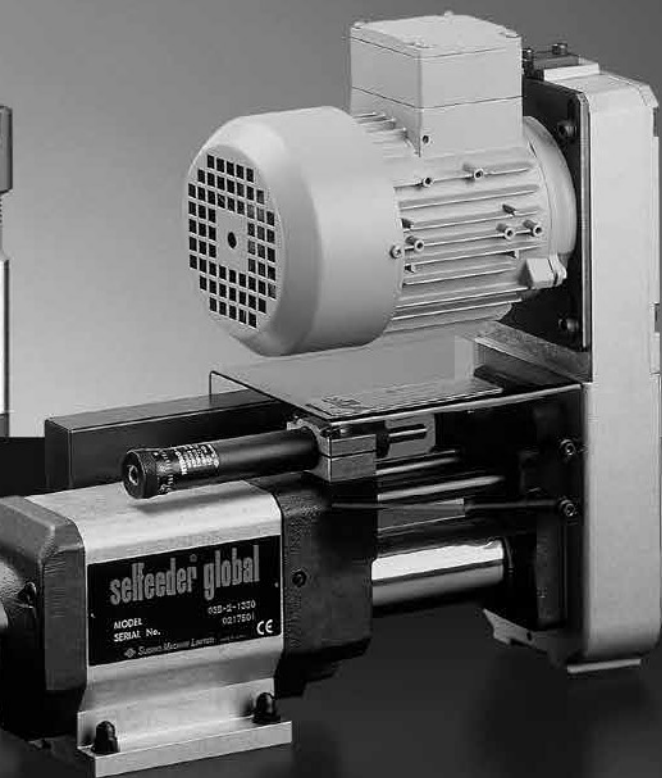

INDEX

■ Drill Heads

Spindle Pitch Adjustable Type

Drill Chuck Style , Collet Chuck Style 4

Fixed Spindle Type

Collet Chuck Style 6

Adjustable Spindle Nose Style 12

Quick Change "Catch-Clip" Type

Collet Chuck Style 14

Adjustable Spindle Nose Style 16

Offset Fixed Type

Drill Chuck Style 18

Collet Chuck Style 19

Adjustable Spindle Nose Style 20

Collet Holder / Reamer Holder 21

■ Tapper Heads

Spindle Pitch Adjustable Type

Sleeve Style 22

Fixed Spindle Type

Sleeve Style , Collet Chuck Style 23

Adjustable Spindle Nose Style 26

Quick Change "Catch-Clip" Type

Sleeve Style , Collet Chuck Style 28

Adjustable Spindle Nose Style 30

Offset Fixed Type

Sleeve Style 32

Tap Holders 33

Coolant Holder / Milling Head 34

INQUIRY SHEET FOR MULTI-SPINDLE

DRILLING , TAPPING HEADS 35


DRILL HEADS

Spindle Pitch Adjustable Type


Drill Heads with adjustable spindle pitch. Drill Chuck and Collet Chuck styles are available.

Drill Chuck Style, Collet Chuck Style

Drill Chuck Style

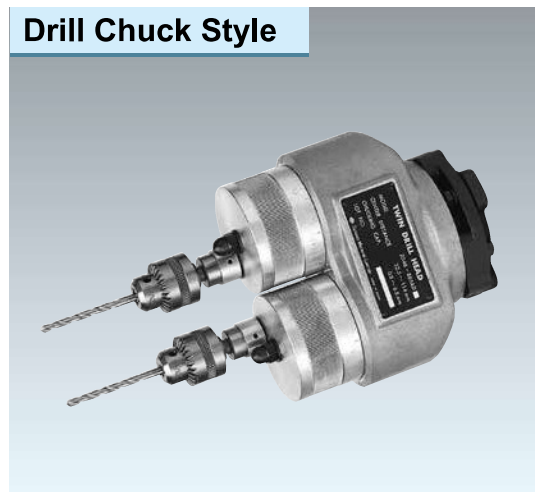


Dimensions (mm)

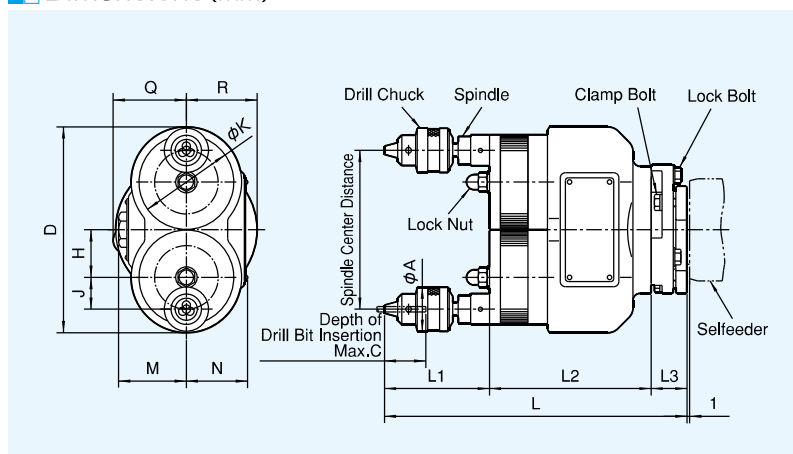


Dimensions (mm)

Model	Symbol	D	L	L1	L2	L3	A	C	H	J	K	M	N	Q	R
2D21-540AD		111	202.5	60.5	117	25	21	22	25,375	16,875	50.3	41	35	41	39
2D41-540AD		111	203.5	60.5	117	26	21	22	25,375	16,875	50.3	48	35	49	46
2D46-540AD		111	219.5	60.5	133	26	21	22	25,375	16,875	50.3	48	35	49	46
2D41-865AD		149	219	76	117	26	32	30	34.5	23	68.5	50	44	49	46
2D46-865AD		149	219	76	117	26	32	30	34.5	23	68.5	50	44	49	46

Collet Chuck Style

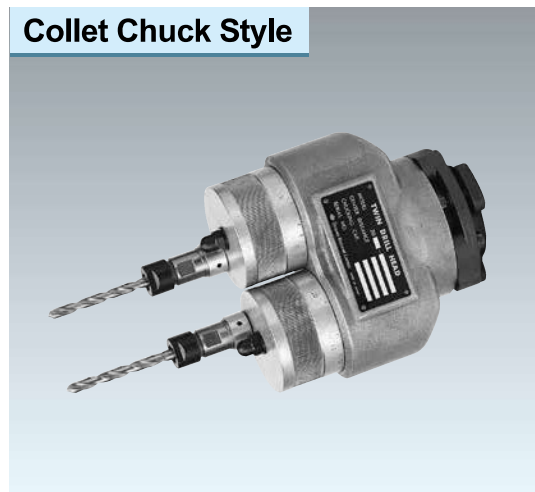

Dimensions (mm)

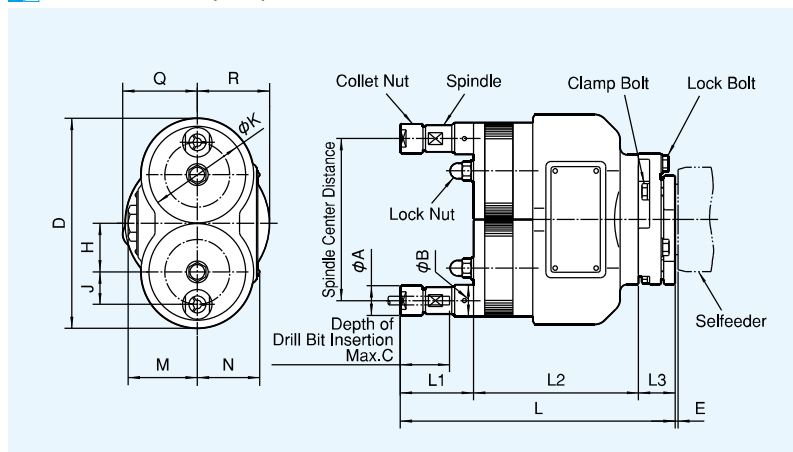

Dimensions (mm)

Model	Symbol	D	L	L1	L2	L3	A	B	C	E	H	J	K	M	N	Q	R
2D21-845AP		111	185.5	43.5	117	25	14.8	16.8	30	1	25,375	16,875	50.3	41	35	41	39
2D41-845AP		111	186.5	43.5	117	26	14.8	16.8	30	1	25,375	16,875	50.3	48	35	49	46
2D46-845AP		111	202.5	43.5	133	26	14.8	16.8	30	1	25,375	16,875	50.3	48	35	49	46
2D41-2075AP		149	195	52	117	26	21	22.5	35	1	34.5	23	68.5	50	44	49	46
2D46-2075AP		149	195	52	117	26	21	22.5	35	1	34.5	23	68.5	50	44	49	46
2D56-50130AP		190	274	75	160	39	34	33	56	2	45	27	89	58	52	66	64
2D6N-50130AP		226	289	75	163	51	34	40	56	2	54	31.5	106	72	64	87	84

 Drilling Capacity(mm)

Operating Air Pressure :0.5MPa

Specs Model	Spindle Center Distance (Min.~Max.)	Chucking Capacity	Chucking Type	Speed Ratio (Output/Input)	Max. Drill Size			Applicable Selffeeder Model						
					Alumi- nium	Cast Iron	Carbon Steel							
2D21-540AD	22 ~ 84	1 ~ 4	Drill Chuck	1	4	2.5	2	ES2-6030						
2D21-845AP	17 ~ 84	0.8 ~ 5	Collet Chuck		4	3	3	ES2-6020						
					5	4	4	ES2-6014						
2D41-540AD	22 ~ 84	1 ~ 4	Drill Chuck	1	4.5	3.5	3	ES3C-60□□L (Notes2)						
2D41-845AP	17 ~ 84	0.8 ~ 5	Collet Chuck											
2D46-540AD	22 ~ 84	1 ~ 4	Drill Chuck	1	5	4.5	4	ES3C-13□□L (Notes2)						
2D46-845AP	17 ~ 84	0.8 ~ 5	Collet Chuck											
2D41-865AD	32.5 ~ 114	1 ~ 6.5	Drill Chuck	1	4	2.5	2	ES3C-6030L						
2D41-2075AP	23 ~ 114	1 ~ 7.5	Collet Chuck		4.5	3.5	3	ES3C-6022L						
2D46-865AD 2D46-2075AP	32.5 ~ 114 23 ~ 114	1 ~ 6.5 1 ~ 7.5	Drill Chuck Collet Chuck	1	5	4	3.5	ES3C-1314L						
					6	5	4	ES3C-1309L						
					7	6	5	ES3C-1305L						
					5	3	3	GSB-4-1330/L						
					6	3.5	3.5	ES3P-1326L/LL	GSB-4-1323/L	GSB-2-1330/L				
					7	4.5	3.5	ES3P-1318L/LL	GSB-4-1315/L	GSB-2-1320/L				
					7	5.5	5	ES3P-1314L/LL						
					7.5	6	5	ES3P-1310L/LL	GSB-4-1310/L	GSB-2-1315/L				
					7.5	6	5	ES3P-1307L/LL	GSB-4-1307/L	GSB-2-1312/L				
					8	6.5	5.5	ES3P-1305L/LL						
					2D56-50130AP	36.5 ~ 143	1.5 ~ 13	Collet Chuck	1	8	5	4.5	ES5-1320	
										9	6	5.5	ES5-1314	
9	7	6	ES5-1311											
10	7	6	ES5-1308											
11	7.5	6.5	ES5-1306											
11.5	8	6.5	ES5-1304											
2D6N-50130AP	45.5 ~ 170	1.5 ~ 13	Collet Chuck	1	13	8.5	8	ES6-2411F						
					13	11	10	ES6-2408F						
					13	12	11	ES6-2406F						
					13	11	9.5	ES6-2405F						
					13	12	11	ES6-2403F						
					13	12	11	ES6-2402F						

Notes1.The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 ,Carbon Steel : S45C

2.Suitable for installation into Selffeeders other than ES-type and GS-type as well.

For more information, please contact our distributor or subsidiary nearest you.

3.Other models of Selffeeders are applicable. Please contact our local distributor or subsidiary for the details.

4.Please use Collet Chuck Spindle Noses when using drills such as carbide drills which have harder tool shank than high speed steel drills.

Fixed Spindle Type

Collet Chuck Style


Sugino can provide Drill Heads for your special requirements.

Various collet diameters are available.

2-Spindle



Dimensions (mm)

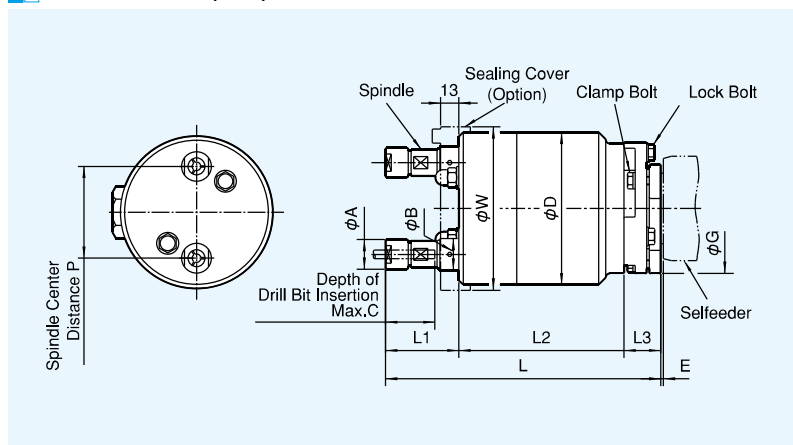

Dimensions (mm)

Symbol Model	P	D	L	L1	L2	L3	A	B	C	E	G	W
2D21-1540BTE	12 ~ 12.6	108	179	37	117	25	11.8	—	23.5	1	78	112
2D21-550BP	12.6 ~ 17	108	186	44	117	25	12.4	—	25	1	78	112
2D21-845BP	17 ~ 23	108	185.5	43.5	117	25	14.8	16.8	30	1	78	112
2D21-570BP	17.2 ~ 23	108	195	53	117	25	16	—	36	1	78	112
2D21-2075BP	23 ~ 69	108	194	52	117	25	21	22.5	35	1	78	112
2D41-1530BTE	10 ~ 11	108	162.5	31.5	105	26	9.8	—	22.5	1	92	112
2D46-1530BTE			178.5		121							
2D41-1530BTE	11 ~ 12	108	164	33	105	26	10.8	—	22.5	1	92	112
2D46-1530BTE			180		121							
2D41-1540BTE	12 ~ 12.6	108	180	37	117	26	11.8	—	23.5	1	92	112
2D46-1540BTE			196		133							
2D41-550BP	12.6 ~ 17	108	187	44	117	26	12.4	—	25	1	92	112
2D41-845BP	17 ~ 23	108	186.5	43.5	117	26	14.8	16.8	30	1	92	112
2D46-845BP			202.5		133							
2D41-570BP	17.2 ~ 23	108	196	53	117	26	16	—	36	1	92	112
2D46-570BP			212		133							
2D41-2075BP	23 ~ 69	108	195	52	117	26	21	22.5	35	1	92	112
	69 ~ 109	148										152
2D46-2075BP	23 ~ 69	108										112
	69 ~ 109	148										152
2D56-5100BP	24.2 ~ 41	148	264	65	160	39	24	—	46	2	128	152
2D56-50130BP	41 ~ 97	148	274	75	160	39	34	40	56	2	128	152
	97 ~ 137	188										194
2D6N-5100BP	24.2 ~ 41	148	279	65	163	51	24	—	46	2	176	152
2D6N-50130BP	41 ~ 97	148	289	75	163	51	34	40	56	2	176	152
	97 ~ 137	188										194

Note: Heads with different spindle pitches not shown in the above chart can be manufactured. Please contact our local distributor or subsidiary for details.

 Drilling Capacity(mm)

Operating Air Pressure :0.5MPa

Specs Model	Spindle Center Distance (Min.~Max.)	Chucking Capacity	Chucking Type Collet Chuck	Max. Drill Size			Applicable Selffeeder Model		
				Alumi- nium	Cast Iron	Carbon Steel			
2D21-1540BTE	12 ~ 12.6	1.1 ~ 4	Screw-in Type	3,5	2,5	2	ES2-60□□ (Notes2)	GSA-2-60□□ (Notes2)	
2D21-550BP	12.6 ~ 17	1.1 ~ 5	Push-in Type	4	3	3	ES2-60□□ (Notes2)	GSA-2-60□□ (Notes2)	
2D21-845BP	17 ~ 23	0.8 ~ 5	Push-in Type	4	2,5	2	ES2-6030	GSA-2-60□□ (Notes2)	
				4	3	3	ES2-6020	GSA-2-60□□ (Notes2)	
				5	4	4	ES2-6014	GSA-2-60□□ (Notes2)	
2D21-570BP	17.2 ~ 23	1.1 ~ 7	Push-in Type	4	2,5	2	ES2-6030	GSA-2-6030	
				4	3	3	ES2-6020	GSA-2-6020	
				5	4	4	ES2-6014	GSA-2-6015	
				5	4,5	4		GSA-2-6011	
2D21-2075BP	23 ~ 69	1 ~ 7,5	Push-in Type	4	2,5	2	ES2-6030	GSA-2-6030	
				4	3	3	ES2-6020	GSA-2-6020	
				5	4	4	ES2-6014	GSA-2-6015	
				5	4,5	4		GSA-2-6011	
2D46-1530BTE	10 ~ 11	1.1 ~ 3	Screw-in Type	2	1,5	1,5	ES3C-13□□L, ES3P-13□□L/LL (Notes2)	GSB-4-13□□/L (Notes2)	
2D46-1530BTE	11 ~ 12	1.1 ~ 3	Screw-in Type	2,5	2	1,5	ES3C-13□□L, ES3P-13□□L/LL (Notes2)	GSB-4-13□□/L (Notes2)	
2D46-1540BTE	12 ~ 12,6	1.1 ~ 4	Screw-in Type	3,5	2,5	2	ES3C-13□□L, ES3P-13□□L/LL (Notes2)	GSB-4-13□□/L (Notes2)	
2D41-550BP	12,6 ~ 17	1.1 ~ 5	Push-in Type	4	3,5	3	ES3C-60□□L (Notes2)		
2D41-845BP	17 ~ 23	0.8 ~ 5	Push-in Type	4,5	3,5	3	ES3C-60□□L (Notes2)		
2D46-845BP	17 ~ 23	0.8 ~ 5	Push-in Type	5	4,5	4	ES3C-13□□L, ES3P-13□□L/LL (Notes2)	GSB-4-13□□/L (Notes2)	
2D41-570BP	17.2 ~ 23	1.1 ~ 7	Push-in Type	4	2,5	2	ES3C-6030L		
				4,5	3,5	3	ES3C-6022L		
2D46-570BP	17.2 ~ 23	1.1 ~ 7	Push-in Type	5	4	3,5	ES3C-1314L		
				6	5	4	ES3C-1309L		
				7	6	5	ES3C-1305L		
				5	3	3		GSB-4-1330/L	
				6	3,5	3,5	ES3P-1326L/LL	GSB-4-1323/L	GSB-2-1330/L
				7	4,5	3,5	ES3P-1318L/LL	GSB-4-1315/L	GSB-2-1320/L
				7	5,5	5	ES3P-1314L/LL		
2D41-2075BP	23 ~ 109	1 ~ 7,5	Push-in Type	4	2,5	2	ES3C-6030L		
				4,5	3,5	3	ES3C-6022L		
				5	4	3,5	ES3C-1314L		
				6	5	4	ES3C-1309L		
				7	6	5	ES3C-1305L		
				5	3	3		GSB-4-1330/L	
				6	3,5	3,5	ES3P-1326L/LL	GSB-4-1323/L	GSB-2-1330/L
				7	4,5	3,5	ES3P-1318L/LL	GSB-4-1315/L	GSB-2-1320/L
				7	5,5	5	ES3P-1314L/LL		
2D46-2075BP	23 ~ 109	1 ~ 7,5	Push-in Type	7,5	6	5	ES3P-1310L/LL	GSB-4-1310/L	GSB-2-1315/L
				7,5	6	5	ES3P-1307L/LL	GSB-4-1307/L	GSB-2-1312/L
				8	6,5	5,5	ES3P-1305L/LL	GSB-4-1306/L	
				8	5	4,5	ES5-1320	GSC-4-1321/L	
				9	6	5,5	ES5-1314	GSC-4-1315/L	GSC-2-1321/L
				9	7	6	ES5-1311	GSC-4-1311/L	GSC-2-1315/L
				10	7	6	ES5-1308	GSC-4-1307/L	
				10	8	6,5	ES5-1304		
				10	9	7,5	ES5-1302		
2D56-5100BP	24,2 ~ 41	1.1 ~ 10	Push-in Type	8	5	4,5	ES5-1320	GSC-4-1321/L	
				9	6	5,5	ES5-1314	GSC-4-1315/L	GSC-2-1321/L
				9	7	6	ES5-1311	GSC-4-1311/L	GSC-2-1315/L
				10	7	6	ES5-1308	GSC-4-1307/L	
				10	8	6,5	ES5-1304		
				10	9	7,5	ES5-1302		
				11,5	8	6,5	ES5-1304		
2D6N-5100BP	24,2 ~ 41	1.1 ~ 10	Push-in Type	13	9	7,5	ES5-1302		
				10	8,5	8	ES6-2411F		
				13	8,5	8	ES6-2411F		
				13	11	10	ES6-2408F		
				13	12	11	ES6-2406F		
				13	11	9,5	ES6-2405F		
				13	12	11	ES6-2403F		
2D6N-50130BP	41 ~ 137	1,5 ~ 13	Push-in Type	13	12	11	ES6-2402F		

Notes1.The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 , Carbon Steel : S45C


2.Suitable for installation into Selffeeders other than ES-type and GS-type as well.

For more information, please contact our distributor or subsidiary nearest you.

3.Other models of Selffeeders are applicable. Please contact our local distributor or subsidiary for the details.


DRILL HEADS & TAPPER HEADS

3-Spindle

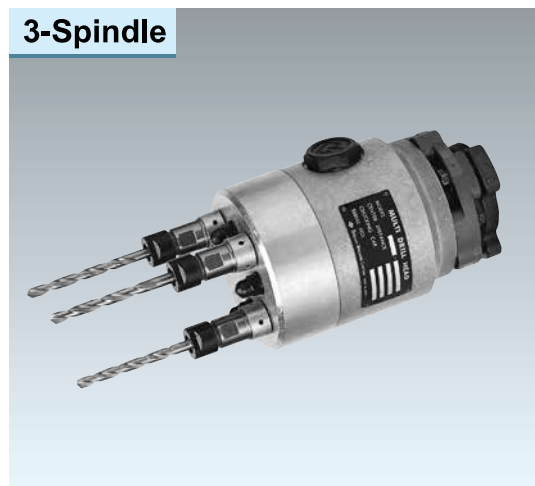

Collet Chuck Style

Dimensions(mm)

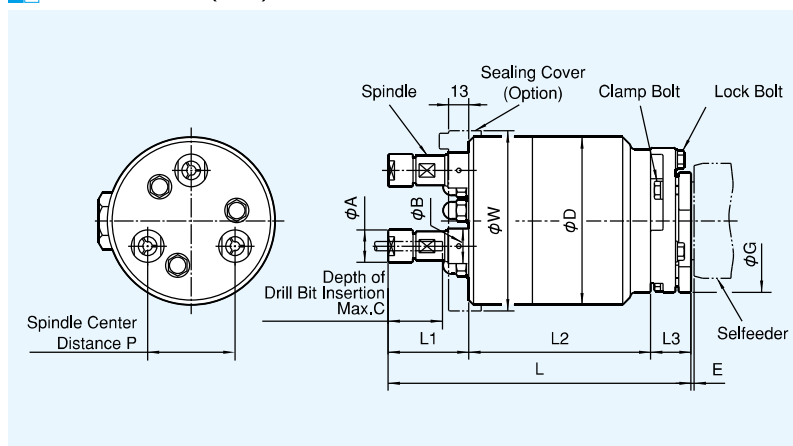

Dimensions(mm)

Model\Symbol	P	D	L	L1	L2	L3	A	B	C	E	G	W
3D41-1530BTE	10 ~ 11	108	162.5	31.5	105	26	9.8	—	22,5	1	92	112
3D46-1530BTE			178.5		121							
3D41-1530BTE	11 ~ 12	108	164	33	105	26	10,8	—	22,5	1	92	112
3D46-1530BTE			180		121							
3D41-1540BTE	12 ~ 12,6	108	180	37	117	26	11,8	—	23,5	1	92	112
3D46-1540BTE			196		133							
3D41-550BP	12,6 ~ 17	108	187	44	117	26	12,4	—	25	1	92	112
3D46-550BP			203		133							
3D41-845BP	17 ~ 23	108	186,5	43,5	117	26	14,8	16,8	30	1	92	112
3D46-845BP			202,5		133							
3D41-570BP	17,2 ~ 23	108	196	53	117	26	16	—	36	1	92	112
3D46-570BP			212		133							
3D41-2075BP	23 ~ 59	108	195	52	117	26	21	22,5	35	1	92	112
	59 ~ 94	148										152
3D46-2075BP	23 ~ 59	108										112
	59 ~ 94	148										152
3D56-5100BP	24,2 ~ 41	148	264	65	160	39	24	—	46	2	128	152
3D56-50130BP	41 ~ 84	148	274	75	160	39	34	40	56	2	128	152
	84 ~ 118	188										194
3D6N-5100BP	24,2 ~ 41	148	279	65	163	51	24	—	46	2	176	152
3D6N-50130BP	41 ~ 84	148	289	75	163	51	34	40	56	2	176	152
	84 ~ 118	188										194

Note: Heads with different spindle pitch not shown in the above chart can be manufactured. Please contact our local distributor or subsidiary for details.

Drilling Capacity(mm)

Operating Air Pressure :0.5MPa

Model	Specs Spindle Center Distance (Min.~Max.)	Chucking Capacity	Chuck Type Collet Chuck	Max. Drill Size			Applicable Selffeeder Model					
				Aluminum	Cast Iron	Carbon Steel						
3D46-1530BTE	10 ~ 11	1.1 ~ 3	Screw-in Type	2	1.5	1.5	ES3C-13□□L, ES3P-13□□L/LL (Notes2)					
3D46-1530BTE	11 ~ 12	1.1 ~ 3	Screw-in Type	2.5	2	1.5	ES3C-13□□L, ES3P-13□□L/LL (Notes2)					
3D46-1540BTE	12 ~ 12.6	1.1 ~ 4	Screw-in Type	3.5	2.5	2	ES3C-13□□L, ES3P-13□□L/LL (Notes2)					
3D41-550BP	12.6 ~ 17	1.1 ~ 5	Push-in Type	3.5	2.5	2	ES3C-60□□L (Notes2)					
3D46-550BP	12.6 ~ 17	1.1 ~ 5	Push-in Type	4	3.5	3	ES3C-13□□L (Notes2)					
3D41-845BP	17 ~ 23	0.8 ~ 5	Push-in Type	3	2	2	ES3C-6022L					
3D46-845BP	17 ~ 23	0.8 ~ 5	Push-in Type	4.5	4	3.5	ES3C-13□□L (Notes2)					
3D41-570BP	17.2 ~ 23	1.1 ~ 7	Push-in Type	5	4.5	3.5	ES3P-13□□L/LL (Notes2)					
3D46-570BP	17.2 ~ 23	1.1 ~ 7	Push-in Type	3.5	2.5	2	ES3C-6022L					
				4	3.5	3	ES3C-1314L					
				4.5	4	3.5	ES3C-1309L					
				6	5	4	ES3C-1305L					
				4	3	3	GSB-4-1330/L					
				5	3.5	3.5	ES3P-1326L/LL					
				6	4	3.5	ES3P-1318L/LL					
				6	5	3.5	ES3P-1314L/LL					
				6	5	3.5	ES3P-1310L/LL					
				6	5	3.5	ES3P-1307L/LL					
				6.5	5	4	ES3P-1305L/LL					
				6.5	4	4	ES4P-1320/L					
3D41-2075BP	23 ~ 94	1 ~ 7.5	Push-in Type	7	5	4	ES4P-1314/L					
				7	5	4.5	ES4P-1311/L					
				3.5	2.5	2	ES3C-6022L					
				4	3.5	3	ES3C-1314L					
3D46-2075BP	23 ~ 94	1 ~ 7.5	Push-in Type	4.5	4	3.5	ES3C-1309L					
				6	5	4	ES3C-1305L					
				4	3	3	GSB-4-1330/L					
				4	3	3	GSB-4-1330/L					

Specs Model	Spindle Center Distance (Min.~Max.)	Chucking Capacity	Chuck Type Collet Chuck	Max. Drill Size			Applicable Selffeeder Model
				Alumi- nium	Cast Iron	Carbon Steel	
3D46-2075BP	23 ~ 94	1 ~ 7.5	Push-in Type	5	3.5	3.5	ES3P-1326L/LL GSB-4-1323/L GSB-2-1330/L
				6	4	3.5	ES3P-1318L/LL GSB-4-1315/L GSB-2-1320/L
				6	5	3.5	ES3P-1314L/LL
				6	5	3.5	ES3P-1310L/LL GSB-4-1310/L GSB-2-1315/L
				6	5	3.5	ES3P-1307L/LL GSB-4-1307/L GSB-2-1312/L
				6.5	5	4	ES3P-1305L/LL GSB-4-1306/L
				6.5	4	4	ES4P-1320/L
				7	5	4	ES4P-1314/L
				7	5	4.5	ES4P-1311/L
				7.5	5.5	5	ES4P-1308/L
				7.5	5.5	5	ES4P-1306/L
				7.5	6	5	ES4P-1304/L
				7	4	4	ES5-1320 GSC-4-1321/L
3D56-5100BP	24.2 ~ 41	1.1 ~ 10	Push-in Type	7	5.5	5	ES5-1314 GSC-4-1315/L GSC-2-1321/L
				7.5	5.5	5	ES5-1311 GSC-4-1311/L GSC-2-1315/L
				8	6	5.5	ES5-1308
				8	6	6	ES5-1306 GSC-4-1307/L
				9	6	6	ES5-1304
3D56-50130BP	41 ~ 118	1.5 ~ 13	Push-in Type	7	4	4	ES5-1320 GSC-4-1321/L
				7	5.5	5	ES5-1314 GSC-4-1315/L GSC-2-1321/L
				7.5	5.5	5	ES5-1311 GSC-4-1311/L GSC-2-1315/L
				8	6	5.5	ES5-1308
				8	6	6	ES5-1306 GSC-4-1307/L
				9	6	6	ES5-1304
3D6N-5100BP	24.2 ~ 41	1.1 ~ 10	Push-in Type	10	6.5	6	ES6-2414F
				10	8.5	8	ES6-2411F
3D6N-50130BP	41 ~ 118	1.5 ~ 13	Push-in Type	12	6.5	6	ES6-2414F
				11	8.5	8	ES6-2411F
				13	10	8	ES6-2408F
				13	12	9	ES6-2406F
				11.5	9.5	8	ES6-2405F
				13	10.5	9	ES6-2403F
				13	12	9	ES6-2402F

Notes1.The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 ,Carbon Steel : S45C


2.Suitable for installation into Selffeeders other than ES-type and GS-type as well.

For more information, please contact our distributor or subsidiary nearest you.

3.Other models of Selffeeders are applicable. Please contact our local distributor or subsidiary for the details.


DRILL HEADS & TAPPER HEADS

4-Spindle

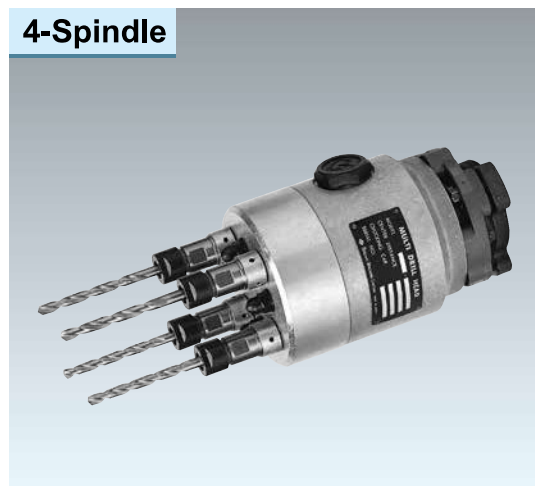

Collet Chuck Style

Dimensions(mm)

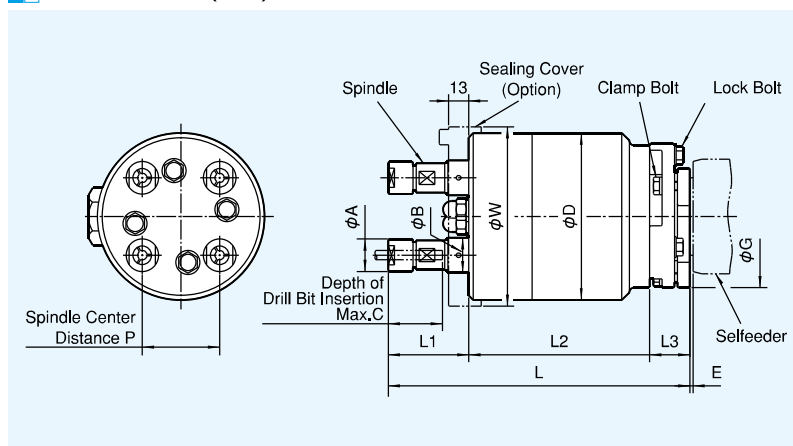

Dimensions(mm)

Symbol Model	P	D	L	L1	L2	L3	A	B	C	E	G	W
4D46-1530BTE	10 ~ 11	108	178.5	31.5	121	26	9.8	—	22.5	1	92	112
4D46-1530BTE	11 ~ 12	108	180	33	121	26	10.8	—	22.5	1	92	112
4D46-1540BTE	12 ~ 12.6	108	196	37	133	26	11.8	—	23.5	1	92	112
4D41-550BP	12.6 ~ 17	108	187	44	117	26	12.4	—	25	1	92	112
203			133									
186.5			117									
4D41-845BP	17 ~ 23	108	202.5	43.5	133	26	14.8	16.8	30	1	92	112
196			117									
212			133									
4D41-570BP	17.2 ~ 23	108	196	53	117	26	16	—	36	1	92	112
212			133									
4D41-2075BP	23 ~ 77	148	195	52	117	26	21	22.5	35	1	92	152
4D46-2075BP												
4D56-5100BP	24.2 ~ 41	148	264	65	160	39	24	—	46	2	128	152
4D56-50130BP	41 ~ 68	148	274	75	160	39	34	40	56	2	128	152
	68 ~ 96	188										194
4D6N-5100BP	24.2 ~ 41	148	279	65	163	51	24	—	46	2	176	152
4D6N-50130BP	41 ~ 68	148	289	75	163	51	34	40	56	2	176	152
	68 ~ 96	188										194

Note: Heads with any spindle pitches other than mentioned above, or ones with five or more spindles can be manufactured.

Please contact our distributor or subsidiary for the details.

Drilling Capacity(mm)

Operating Air Pressure :0.5MPa

Model	Specs	Spindle Center Distance (Min.~Max.)	Chucking Capacity	Chuck Type	Max. Drill Size			Applicable Selffeeder Model				
					Aluminum	Cast Iron	Carbon Steel					
4D46-1530BTE	10 ~ 11	1.1 ~ 3	Screw-in Type	2	1.5	1.5	ES3C-13□□L, ES3P-13□□L/LL(Notes2)					
4D46-1530BTE	11 ~ 12	1.1 ~ 3	Screw-in Type	2.5	2	1.5	ES3C-13□□L, ES3P-13□□L/LL(Notes2)					
4D46-1540BTE	12 ~ 12.6	1.1 ~ 4	Screw-in Type	3.5	2.5	2	ES3C-13□□L, ES3P-13□□L/LL(Notes2)					
4D46-550BP	12.6 ~ 17	1.1 ~ 5	Push-in Type	3	2.5	2	ES3C-13□□L (Notes2)					
4D46-845BP	17 ~ 23	0.8 ~ 5	Push-in Type	3	2.5	2	ES3C-1314L					
				4	3.5	3	ES3C-1309L					
				5	4	3.5	ES3C-1305L					
				4	3.5	2.5	ES3P-1326L/LL					
				5	3.5	2.5	ES3P-1318L/LL					
				5	4	2.5	ES3P-1314L/LL					
				5	4	3	ES3P-1310L/LL					
				5	4	3.5	ES3P-1307L/LL					
				5	4	3.5	ES3P-1305L/LL					
				5	4	3.5	ES3P-1305L/LL					
4D46-570BP	17.2 ~ 23	1.1 ~ 7	Push-in Type	3	2.5	2						
				4	3.5	3						
				5	4	3.5						
				4	3.5	2.5	ES3P-1326L/LL					
				5	3.5	2.5	ES3P-1318L/LL					
				5	4	2.5	ES3P-1314L/LL					
				5	4	3	ES3P-1310L/LL					
				5	4	3.5	ES3P-1307L/LL					
				5	4	3.5	ES3P-1305L/LL					
				6	3.5	3.5	ES4P-1320/L					
				6	4	4	ES4P-1314/L					
				6	4	4	ES4P-1311/L					
				6.5	4.5	4	ES4P-1308/L					
				6.5	4.5	4	ES4P-1306/L					
				6.5	5	4.5	ES4P-1304/L					

Specs Model	Spindle Center Distance (Min.~Max.)	Chucking Capacity	Chucking Type Collet Chuck	Max. Drill Size			Applicable Selffeeder Model
				Alumi- nium	Cast Iron	Carbon Steel	
4D46-2075BP	23 ~ 77	1 ~ 7.5	Push-in Type	3	2.5	2	ES3C-1314L
				4	3.5	3	ES3C-1309L
				5	4	3.5	ES3C-1305L
				4	3.5	2.5	ES3P-1326L/LL GSB-4-1323/L GSB-2-1330/L
				5	3.5	2.5	ES3P-1318L/LL GSB-4-1315/L GSB-2-1320/L
				5	4	2.5	ES3P-1314L/LL
				5	4	3	ES3P-1310L/LL GSB-4-1310/L GSB-2-1315/L
				5	4	3.5	ES3P-1307L/LL GSB-4-1307/L GSB-2-1312/L
				5	4	3.5	ES3P-1305L/LL GSB-4-1306/L
				6	3.5	3.5	ES4P-1320/L
				6	4	4	ES4P-1314/L
				6	4	4	ES4P-1311/L
				6.5	4.5	4	ES4P-1308/L
				6.5	4.5	4	ES4P-1306/L
				6.5	5	4.5	ES4P-1304/L
4D56-5100BP	24.2 ~ 41	1.1 ~ 10	Push-in Type	6.5	4	4	ES5-1320 GSC-4-1321/L
				6.5	4.5	4	ES5-1314 GSC-4-1315/L GSC-2-1321/L
				6.5	4.5	4	ES5-1311 GSC-4-1311/L GSC-2-1315/L
				6.5	5	4	ES5-1308
				7	5	4.5	ES5-1306 GSC-4-1307/L
				7	6	5	ES5-1304
4D56-50130BP	41 ~ 96	1.5 ~ 13	Push-in Type	6.5	4	4	ES5-1320 GSC-4-1321/L
				6.5	4.5	4	ES5-1314 GSC-4-1315/L GSC-2-1321/L
				6.5	4.5	4	ES5-1311 GSC-4-1311/L GSC-2-1315/L
				6.5	5	4	ES5-1308
				7	5	4.5	ES5-1306 GSC-4-1307/L
				7	6	5	ES5-1304
4D6N-5100BP	24.2 ~ 41	1.1 ~ 10	Push-in Type	8	6	5	ES5-1302
				10	6.5	6	ES6-2414F
				9.5	8	7	ES6-2411F
				10	9	7.5	ES6-2408F
4D6N-50130BP	41 ~ 96	1.5 ~ 13	Push-in Type	10	8	7.5	ES6-2405F
				10	6.5	6	ES6-2414F
				9.5	8	7	ES6-2411F
				11	9	7.5	ES6-2408F
				13	9.5	7.5	ES6-2406F
				10	8	7.5	ES6-2405F
				12	9.5	7.5	ES6-2403F
				13	9.5	7.5	ES6-2402F

Notes1.The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 , Carbon Steel : S45C

2.Suitable for installation into Selffeeders other than ES-type and GS-type as well.

For more information, please contact our distributor or subsidiary nearest you.

3.Other models of Selffeeders are applicable. Please contact our local distributor or subsidiary for the details.



Speed Increase Type Single Spindle Head
(Max.15,000min⁻¹)

Fixed Spindle Type

Adjustable Spindle Nose Style


These Drill Heads are used with adjustable adapters. Pre-set tooling is required for specific applications.

Adjustable Spindle Nose Style

2-Spindle



Dimensions (mm)

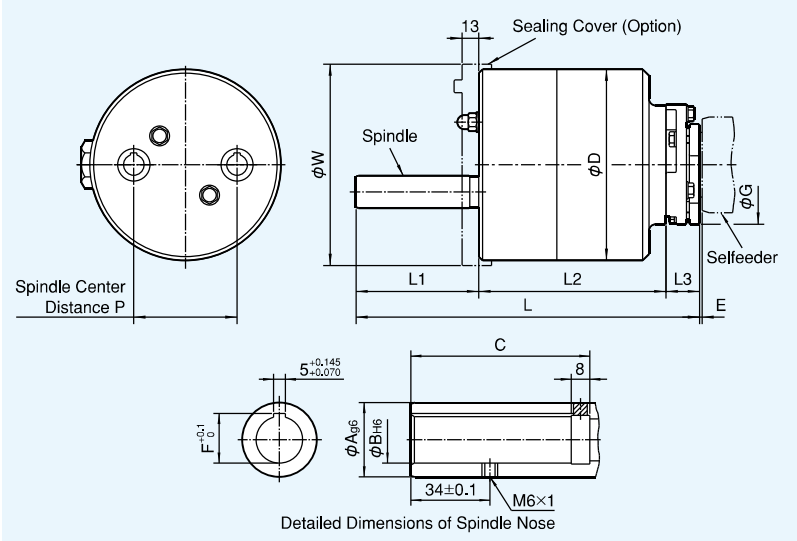


Dimensions (mm)

Model	Symbol	Applicable Adapter	P	D	L	L1	L2	L3	A	B	C	F	E	G	W
2D46-AM1E	BILZ16		26 ~ 57	108	266	95	145	26	25	16	74	17.3	1	92	112
			57 ~ 100	148											152
	BILZ20		33 ~ 52	108	271	100	145	26	32	20	77	21.3	1	92	112
			52 ~ 95	148											152
2D56-AM1E	BILZ16		26 ~ 100	148	294	95	160	39	25	16	74	17.3	2	128	152
			100 ~ 142	188											194
	BILZ20		33 ~ 95	148	299	100	160	39	32	20	77	21.3	2	128	152
			95 ~ 137	188											194
2D6N-AM1E	BILZ16		26 ~ 100	148	309	95	163	51	25	16	74	17.3	2	176	152
			100 ~ 142	188											194
	BILZ20		33 ~ 95	148	314	100	163	51	32	20	77	21.3	2	176	152
			95 ~ 137	188											194

Note: Heads with any Spindle pitches other than mentioned above, or ones with specific Spindle Noses for Holders from various manufacturers can be supplied upon request.
Please contact our distributor or subsidiary for the details.




5 Spindle Head With Guide Bushes
(With sealing cover)

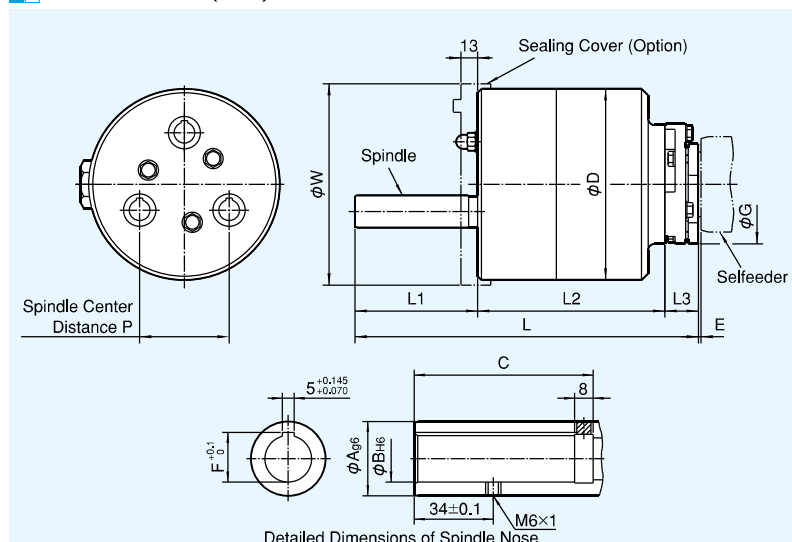3-Spindle**Dimensions(mm)****Dimensions(mm)**

Model	Symbol	Applicable Adapter	P	D	L	L1	L2	L3	A	B	C	F	E	G	W
3D46-AM1E		BILZ16	26 ~ 86	148	266	95	145	26	25	16	74	17.3	1	92	152
		BILZ20	33 ~ 82	148	271	100	145	26	32	20	77	21.3	1	92	152
3D56-AM1E		BILZ16	26 ~ 86	148	294	95	160	39	25	16	74	17.3	2	128	152
			86 ~ 122	188											194
		BILZ20	33 ~ 82	148	299	100	160	39	32	20	77	21.3	2	128	152
			82 ~ 118	188											194
3D6N-AM1E		BILZ16	26 ~ 86	148	309	95	163	51	25	16	74	17.3	2	176	152
			86 ~ 122	188											194
		BILZ20	33 ~ 82	148	314	100	163	51	32	20	77	21.3	2	176	152
			82 ~ 118	188											194

Note: Heads with any Spindle pitches other than mentioned above, or ones with specific Spindle Noses for Holders from various manufacturers can be supplied upon request. Please contact our distributor or subsidiary for the details.

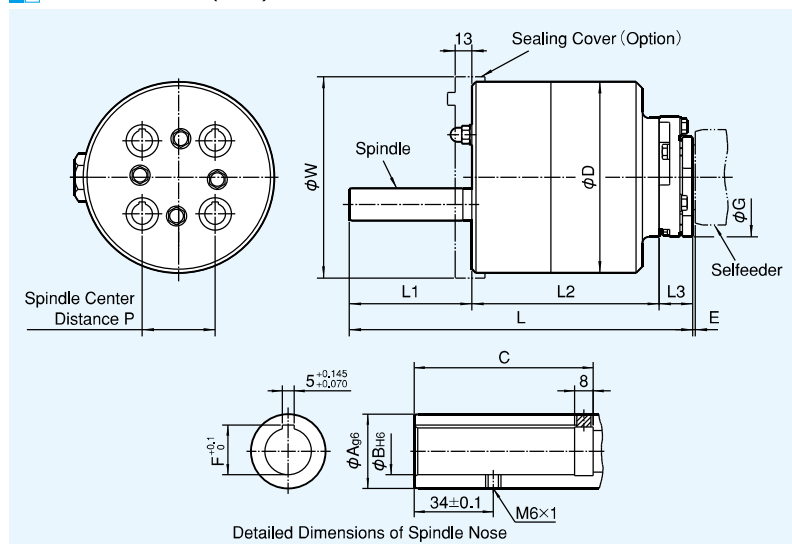4-Spindle**Dimensions(mm)****Dimensions(mm)**


Model	Symbol	Applicable Adapter	P	D	L	L1	L2	L3	A	B	C	F	E	G	W
4D46-AM1E		BILZ16	26 ~ 70	148	266	95	145	26	25	16	74	17.3	1	92	152
		BILZ20	33 ~ 67	148	271	100	145	26	32	20	77	21.3	1	92	152
4D56-AM1E		BILZ16	26 ~ 70	148	294	95	160	39	25	16	74	17.3	2	128	152
			70 ~ 100	188											194
		BILZ20	33 ~ 67	148	299	100	160	39	32	20	77	21.3	2	128	152
			67 ~ 96	188											194
4D6N-AM1E		BILZ16	26 ~ 70	148	309	95	163	51	25	16	74	17.3	2	176	152
			70 ~ 100	188											194
		BILZ20	33 ~ 67	148	314	100	163	51	32	20	77	21.3	2	176	152
			67 ~ 96	188											194

Note: Heads with any spindle pitches other than mentioned above, or ones with five or more spindles can be manufactured. Please contact our distributor or subsidiary for the details.

Quick Change "Catch-Clip" Type


Collet Chuck Style

"Catch-Clip" Drill Heads require little changeover time and improve productivity with minimized machine idle time.

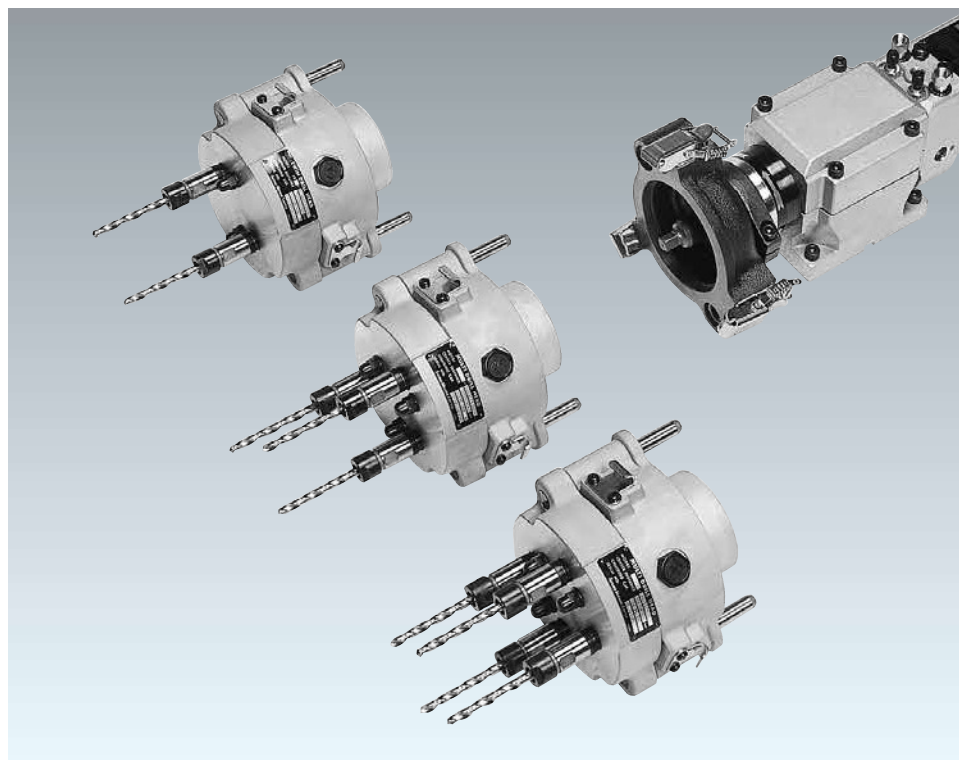


Collet Chuck Style

2-Spindle

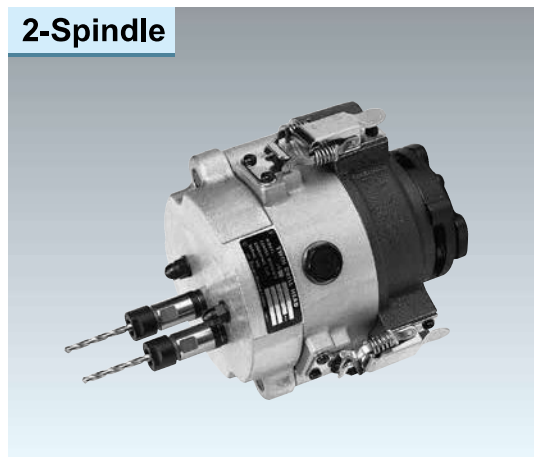

Dimensions (mm)

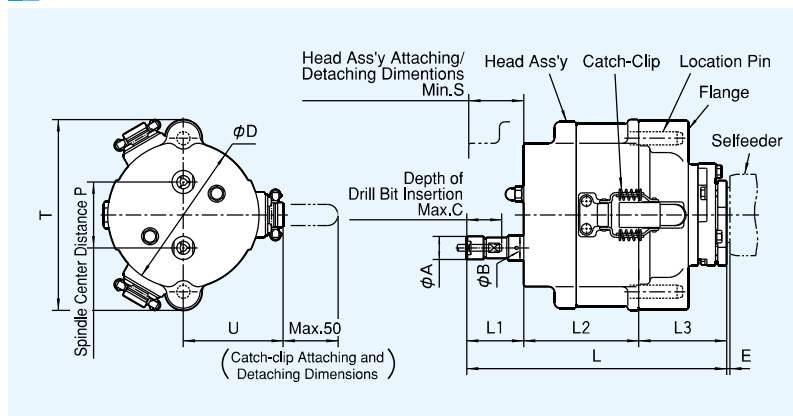


Dimensions (mm)


Symbol Model	P	D	L	L1	L2	L3	A	B	C	E	S	T	U
2D41-550CP	12.6 ~ 17	134	229	44	105	80	12.4	—	25	1	55	174	91
2D46-550CPB											65		
2D41-845CP	17 ~ 23	134	228.5	43.5	105	80	14.8	16.8	30	1	55	174	91
2D46-845CPB											65		
2D41-570CP	17.2 ~ 23	134	238	53	105	80	16	—	36	1	55	174	91
2D46-570CPB											65		
2D41-2075CP	23 ~ 91	134	237	52	105	80	21	22.5	35	1	55	174	91
2D46-2075CPB											65		
2D56-5100CP	24.2 ~ 41	192	316	65	142	109	24	—	46	2	65	254	116
2D56-50130CP	41 ~ 125	192	326	75	142	109	34	40	56	2	65	254	116
2D6N-5100CP	24.2 ~ 41	192	327	65	142	120	24	—	46	2	60	254	116
2D6N-50130CP	41 ~ 125	192	337	75	142	120	34	40	56	2	60	254	116

Note: Heads with different spindle pitches not shown in the above chart can be manufactured. Please contact our local distributor or subsidiary for details.

3-Spindle

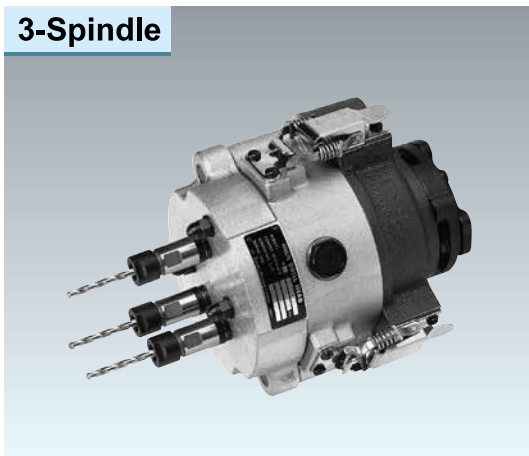

Dimensions(mm)

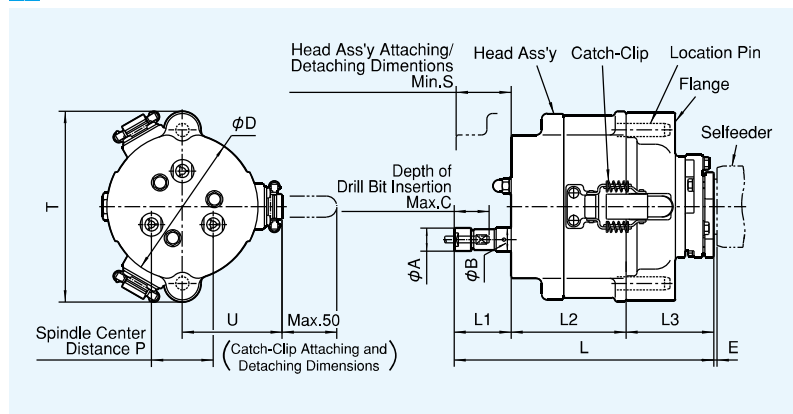


Dimensions(mm)


Symbol Model	P	D	L	L1	L2	L3	A	B	C	E	S	T	U
3D41-550CP	12.6 ~ 17	134	229	44	105	80	12.4	—	25	1	55	174	91
3D46-550CPB											65		
3D41-845CP	17 ~ 23	134	228.5	43.5	105	80	14.8	16.8	30	1	55	174	91
3D46-845CPB											65		
3D41-570CP	17.2 ~ 23	134	238	53	105	80	16	—	36	1	55	174	91
3D46-570CPB											65		
3D41-2075CP	23 ~ 78	134	237	52	105	80	21	22.5	35	1	55	174	91
3D46-2075CPB											65		
3D56-5100CP	24.2 ~ 41	192	316	65	142	109	24	40	46	2	65	254	116
3D56-50130CP	41 ~ 108	192	326	75	142	109	34	—	56	2	65	254	116
3D6N-5100CP	24.2 ~ 41	192	327	65	142	120	24	40	46	2	60	254	116
3D6N-50130CP	41 ~ 108	192	337	75	142	120	34	—	56	2	60	254	116

Note: Heads with different spindle pitches not shown in the above chart can be manufactured. Please contact our local distributor or subsidiary for details.

4-Spindle

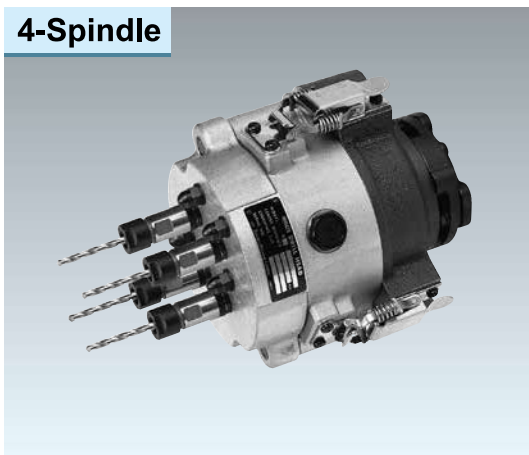

Dimensions(mm)

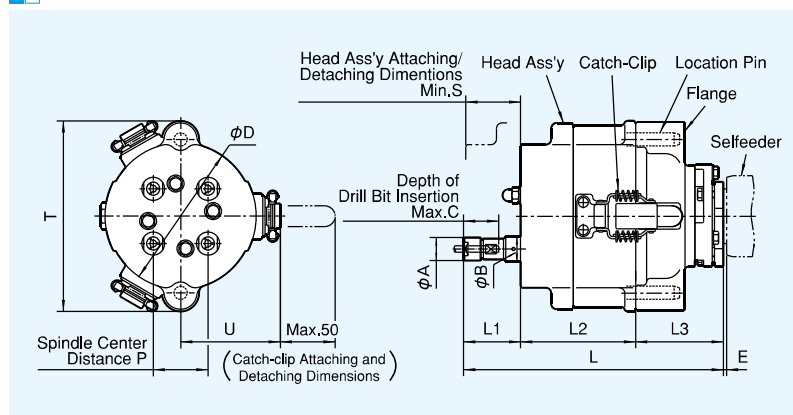

Dimensions(mm)

Symbol Model	P	D	L	L1	L2	L3	A	B	C	E	S	T	U
4D41-550CP	12.6 ~ 17	134	229	44	105	80	12.4	—	25	1	55	174	91
4D46-550CPB											65		
4D41-845CP	17 ~ 23	134	228.5	43.5	105	80	14.8	16.8	30	1	55	174	91
4D46-845CPB											65		
4D41-570CP	17.2 ~ 23	134	238	53	105	80	16	—	36	1	55	174	91
4D46-570CPB											65		
4D41-2075CP	23 ~ 64	134	237	52	105	80	21	22.5	35	1	55	174	91
4D46-2075CPB											65		
4D56-5100CP	24.2 ~ 41	192	316	65	142	109	24	—	46	2	65	254	116
4D56-50130CP	41 ~ 88	192	326	75	142	109	34	40	56	2	65	254	116
4D6N-5100CP	24.2 ~ 41	192	327	65	142	120	24	—	46	2	60	254	116
4D6N-50130CP	41 ~ 88	192	337	75	142	120	34	40	56	2	60	254	116

Note: Heads with any spindle pitches other than mentioned above, or ones with five or more spindles can be manufactured.

Please contact our distributor or subsidiary for the details.

Quick Change "Catch-Clip" Type

Adjustable Spindle Nose Style


"Catch-Clip" Drill Heads are available with adjustable adapters.

Adjustable Spindle Nose Style

2-Spindle



Dimensions (mm)

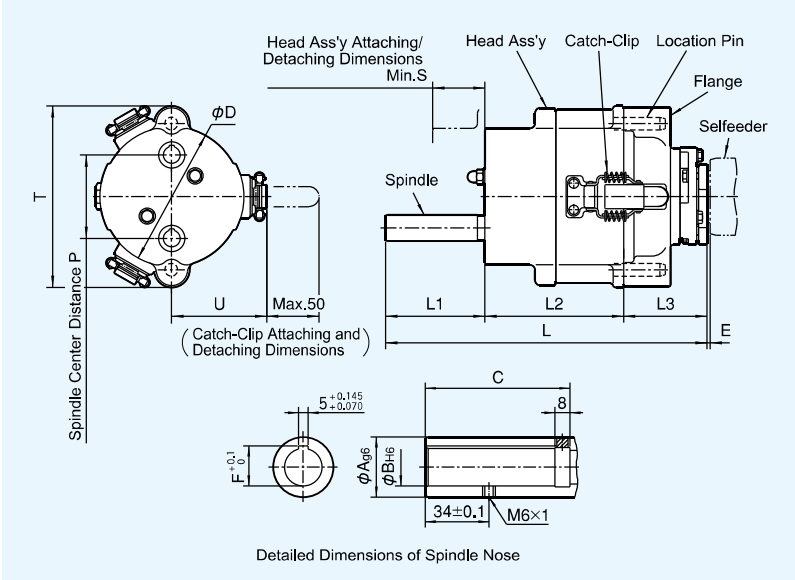

Dimensions (mm)

Model	Symbol	Applicable Adapter	P	D	L	L1	L2	L3	A	B	C	F	E	S	T	U
2D46—AM1C(B)E		BILZ16	26 ~ 82	134	308	95	133	80	25	16	74	17.3	1	65	174	91
		BILZ20	33 ~ 78	134	313	100	133	80	32	20	77	21.3	1	65	174	91
2D56—AM1CE		BILZ16	26 ~ 129	192	346	95	142	109	25	16	74	17.3	2	65	254	116
		BILZ20	33 ~ 125	192	351	100	142	109	32	20	77	21.3	2	65	254	116
2D6N—AM1CE		BILZ16	26 ~ 129	192	357	95	142	120	25	16	74	17.3	2	60	254	116
		BILZ20	33 ~ 125	192	362	100	142	120	32	20	77	21.3	2	60	254	116



Note: Heads with different spindle pitch or with different spindle nose to meet other maker's holder can be supplied upon request.
Please contact our local distributor or subsidiary for details.



9-Spindle Head with Guide Bushes





34-Spindle Head

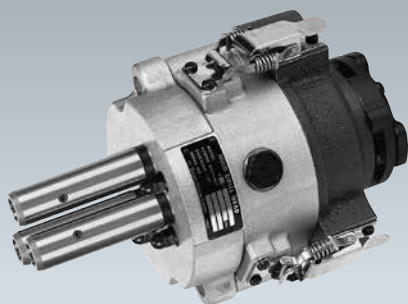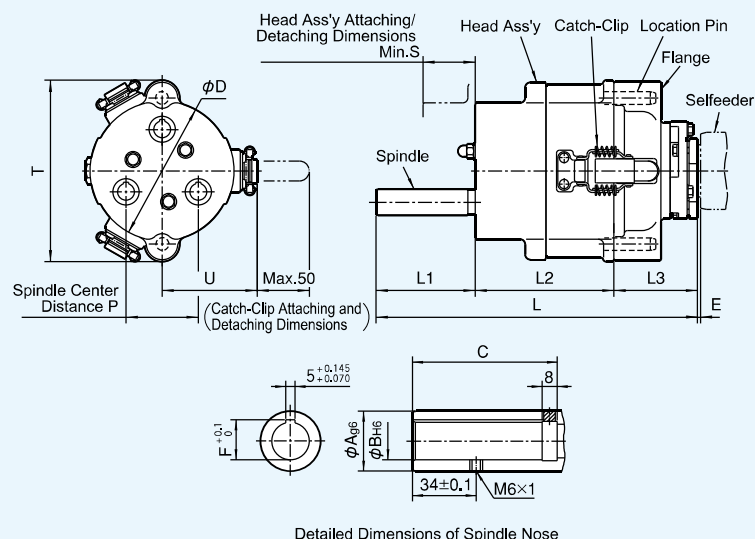3-Spindle**■ Dimensions(mm)****■ Dimensions(mm)**

Model	Symbol	Applicable Adapter	P	D	L	L1	L2	L3	A	B	C	F	E	S	T	U
3D46-AM1C(B)E		BILZ16	26 ~ 71	134	308	95	133	80	25	16	74	17.3	1	65	174	91
		BILZ20	33 ~ 67	134	313	100	133	80	32	20	77	21.3	1	65	174	91
3D56-AM1CE		BILZ16	26 ~ 111	192	346	95	142	109	25	16	74	17.3	2	65	254	116
		BILZ20	33 ~ 108	192	351	100	142	109	32	20	77	21.3	2	65	254	116
3D6N-AM1CE		BILZ16	26 ~ 111	192	357	95	142	120	25	16	74	17.3	2	60	254	116
		BILZ20	33 ~ 108	192	362	100	142	120	32	20	77	21.3	2	60	254	116

Note: Heads with any Spindle pitches other than mentioned above, or ones with specific Spindle Noses for Holders from various manufacturers can be supplied upon request.
Please contact our distributor or subsidiary for the details.

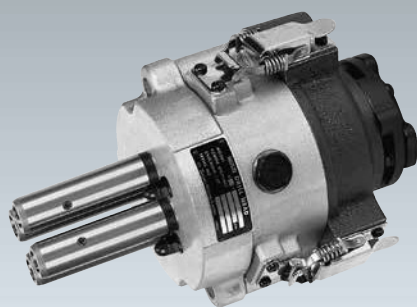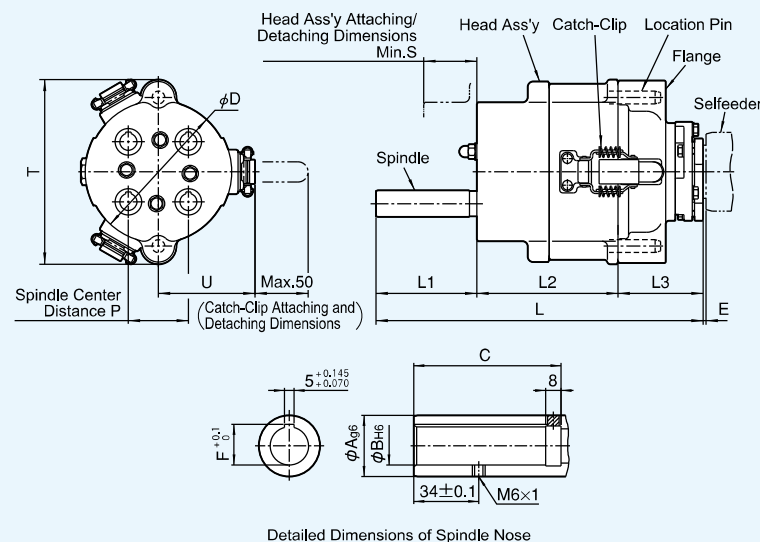4-Spindle**■ Dimensions(mm)****■ Dimensions(mm)**


Model	Symbol	Applicable Adapter	P	D	L	L1	L2	L3	A	B	C	F	E	S	T	U
4D56-AM1CE		BILZ16	26 ~ 91	192	346	95	142	109	25	16	74	17.3	2	65	254	116
		BILZ20	33 ~ 88	192	351	100	142	109	32	20	77	21.3	2	65	254	116
4D6N-AM1CE		BILZ16	26 ~ 91	192	357	95	142	120	25	16	74	17.3	2	60	254	116
		BILZ20	33 ~ 88	192	362	100	142	120	32	20	77	21.3	2	60	254	116

Note: Heads with any spindle pitches other than mentioned above, or ones with five or more spindles can be manufactured.
Please contact our distributor or subsidiary for the details.


Offset Fixed Type

Drill Heads to avoid interference between Drill Units and Jig Fixtures or work pieces.

Drill Chuck Style

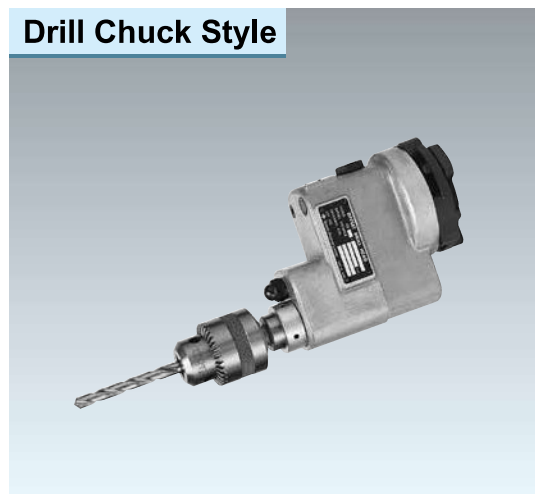

Dimensions (mm)

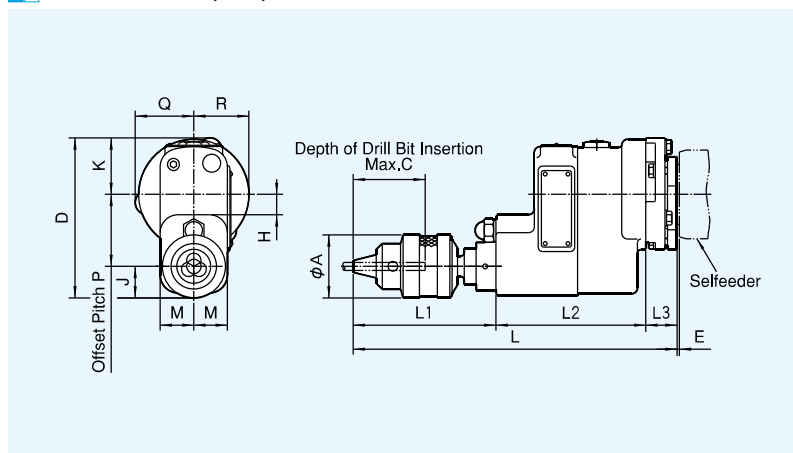

Dimensions (mm)

Model	Symbol	P	D	L	L1	L2	L3	A	C	E	H	J	K	M	Q	R
OD21-865D		45	106	199	76	98	25	32	30	1	10	20	41	26	41	39
OD41-0130D		60	135.3	270	119	125	26	52.5	60	1	17	26,25	49	28	49	46
OD46-0130D		78	174	291	119	133	39	52.5	60	2	25	30	66	32	66	64

Note: Other Offset heads not shown in the above chart can be supplied. Please contact our local distributor or subsidiary for details.

Drilling Capacity (mm)

Operating Air Pressure : 0.5MPa

Specs Model	Offset Pitch	Chucking Capacity	Chucking Type	Speed Ratio (Output/Input)	Max. Drill Size			Applicable Selffeeder Model	
					Alumi- nium	Cast Iron	Carbon Steel		
OD21—865D	45	1 ~ 6.5	Drill Chuck	1	5	3	2.5	ES2—6030	GSA—2—60□□ (Notes2)
					6	4	3	ES2—6020	GSA—2—60□□ (Notes2)
					6.5	5	4	ES2—6014	GSA—2—60□□ (Notes2)
OD41—0130D	60	1.2 ~ 13	Drill Chuck	1	5	2.5	2	ES3C—6030L	
					6	3.5	3	ES3C—6022L	
OD46—0130D	60	1.2 ~ 13	Drill Chuck	1	7	5.5	5	ES3C—1314L	
					8	7	6	ES3C—1309L	
					10	8	7	ES3C—1305L	
					7.5	3.5	3.5	ES3P—1326L/LL	GSB—4—1323/L
					8.5	5	4	ES3P—1318L/LL	GSB—4—1315/L
					9.5	6	5.5	ES3P—1314L/LL	
					10	7	6.5	ES3P—1310L/LL	GSB—4—1310/L
					11	8	7.5	ES3P—1307L/LL	GSB—4—1307/L
					13	10	9	ES3P—1305L/LL	GSB—4—1306/L
					9	5	4.5		ES4P—1320/L
					10	6	6		ES4P—1314/L
					11	8	7		ES4P—1311/L
OD56—0130D	78	1.2 ~ 13	Drill Chuck	1	12	9	8		ES4P—1308/L
					11	5	4.5	ES5—1320	
					12	6.5	6	ES5—1314	GSC—4—1315/L
					12	8	7.5	ES5—1311	GSC—4—1311/L
					13	10	9	ES5—1308	
					13	12	10	ES5—1306	GSC—4—1307/L
					13	13	11	ES5—1304	

Notes1. The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 , Carbon Steel : S45C



2. Suitable for installation into Selffeeders other than ES-type and GS-type as well.

For more information, please contact our distributor or subsidiary nearest you.

3. Other models of Selffeeders are applicable. Please contact our local distributor or subsidiary for the details.

4. Please use Collet Chuck Spindle Noses when using drills such as carbide drills which have harder tool shank than high speed steel drills.

Collet Chuck Style

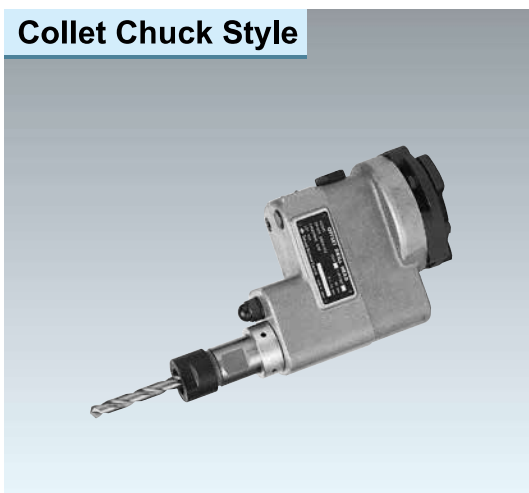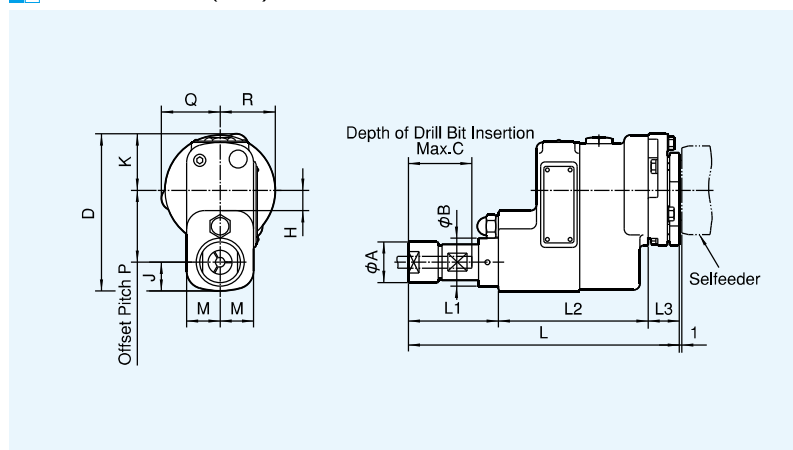
 Dimensions(mm)

 Dimensions(mm)

Model	Symbol	P	D	L	L1	L2	L3	A	B	C	H	J	K	M	Q	R
OD21-2075P		45	106	175	52	98	25	21	22,5	35	10	20	41	26	41	39
OD41-50130P		60	133	226	75	125	26	34	40	56	17	24	49	28	49	46
OD46-50130P																

Note: Other Offset heads not shown in the above chart can be supplied. Please contact our local distributor or subsidiary for details.

 Drilling Capacity(mm)

Operating Air Pressure :0.5MPa

Model	Offset Pitch	Chuck Capacity	Chuck Type	Speed Ratio (Output/Input)	Max. Drill Size			Applicable Selffeeder Model								
					Aluminum	Cast Iron	Carbon Steel									
OD21-2075P	45	1 ~ 7.5	Push-in Type	1	5	3	2.5	ES2-6030	GSA-2-60□□ (Notes2)							
					6	4	3	ES2-6020	GSA-2-60□□ (Notes2)							
					7	5	4	ES2-6014	GSA-2-60□□ (Notes2)							
OD41-50130P	60	1.5 ~ 13	Push-in Type	1	5	2.5	2	ES3C-6030L								
					6	3.5	3	ES3C-6022L								
					7	5.5	5	ES3C-1314L								
OD46-50130P	60	1.5 ~ 13	Push-in Type	1	8	7	6	ES3C-1309L								
					10	8	7	ES3C-1305L								
					7.5	3.5	3.5	ES3P-1326L/LL	GSB-4-1323/L							
					8.5	5	4	ES3P-1318L/LL	GSB-4-1315/L							
					9.5	6	5.5	ES3P-1314L/LL								
					10	7	6.5	ES3P-1310L/LL	GSB-4-1310/L							
					11	8	7.5	ES3P-1307L/LL	GSB-4-1307/L							
					13	10	9	ES3P-1305L/LL	GSB-4-1306/L							
					9	5	4.5	ES4P-1320/L								
					10	6	6	ES4P-1314/L								
					11	8	7	ES4P-1311/L								
					12	9	8	ES4P-1308/L								

Notes1. The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 , Carbon Steel : S45C

2. Suitable for installation into Selffeeders other than ES-type and GS-type as well.


For more information, please contact our distributor or subsidiary nearest you.

3. Other models of Selffeeders are applicable. Please contact our local distributor or subsidiary for the details.

Adjustable Spindle Nose Style



Dimensions(mm)

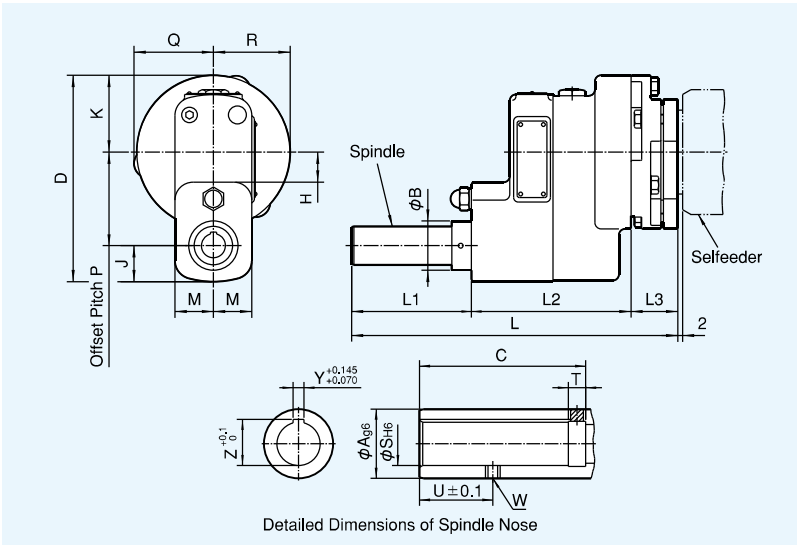

Dimensions(mm)

Model	Symbol	Applicable Adapter	P	D	L	L1	L2	L3	A	B	C	S	T	U	W	Y	Z	H	J	K	M	Q	R
OD56-AM1		BILZ20	78	174	272	100	133	39	32	41	77	20	8	34	M6X1	5	21.3	25	30	66	32	66	64
OD6N-AM2		BILZ25	88	208	310	105	154	51	37	46	85	25	10	38	M8X1.25	6	26.7	29	33	87	40	87	84

Note:Heads to meet other maker's holder can be supplied upon request. Please contact our local distributor or subsidiary for details.

Drilling Capacity(mm)

Operating Air Pressure :0.5MPa

Specs Model	Offset Pitch	Spindle Nose Model	Speed Ratio (Output/Input)	Max. Drill Size			Applicable Selffeeder Model
				Alumi-nium	Cast Iron	Carbon Steel	
OD56-AM1	78	BILZ20	1	11	5	4.5	ES5-1320
				12	6.5	6	ES5-1314 GSC-4-1315/L
				12	8	7.5	ES5-1311 GSC-4-1311/L
				13	10	9	ES5-1308
				14	12	10	ES5-1306 GSC-4-1307/L
				14	13	11	ES5-1304
OD6N-AM2	88	BILZ25	1	—	—	—	ES6-24□□F (Notes2)

- Notes1.The materials quoted are equivalent to following JIS code.
Aluminium : ADC , Cast Iron : FC200 ,Carbon Steel : S45C
2.Suitable for installation into Selffeeders other than ES-type and GS-type as well.
For more information, please contact our distributor or subsidiary nearest you.
3.Other models of Selffeeders are applicable. Please contact our local distributor or subsidiary for the details.

Adjustable Spindle Nose Style




Drill Head Faceplate Type

Collet Holder

Single Collet Chuck type Holder, to be attached to the Spindle of a Drill Unit.



■ Dimensions(mm)

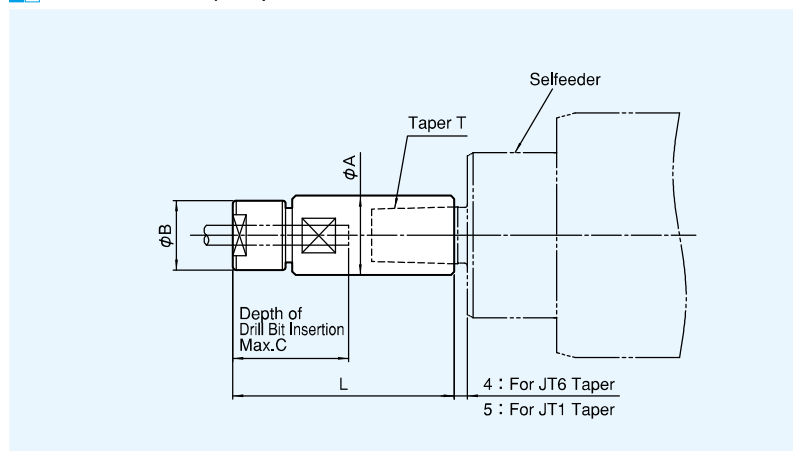

■ Dimensions(mm)

Model	Specs	Chucking Capacity	Chucking Type Collet Chuck	Symbol				
				A	B	C	L	T
CH-845J1		0.8 ~ 5	Push-in Type	14	14.8	30	50	JT1
CH-2075J1		1 ~ 7.5	Push-in Type	20	21	35	56	JT1
CH-2075J6		1 ~ 7.5	Push-in Type	24	21	35	67	JT6
CH-50130J6		1.5 ~ 13	Push-in Type	30	34	56	88	JT6


Note: Other Collet Holders not shown in the above chart can be supplied.
Please contact our local distributor or subsidiary for details.

Reamer Holder

Single Collet Chuck type Holder for reaming with a radial floating.



■ Dimensions(mm)

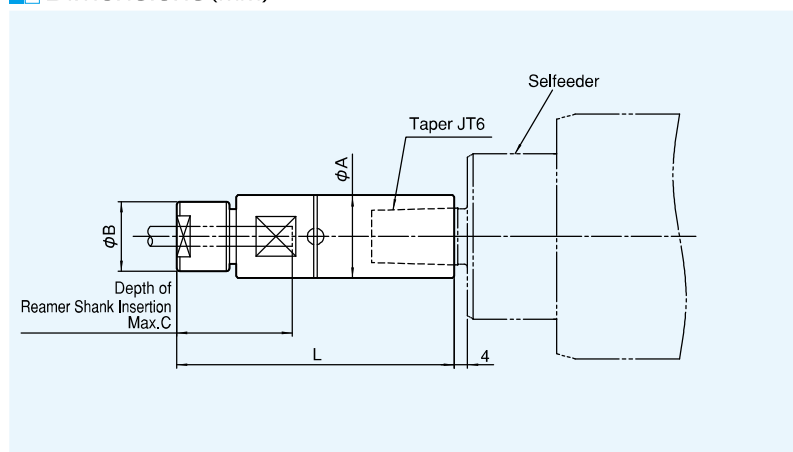

■ Dimensions(mm)

Model	Specs	Chucking Capacity	Chucking Type Collet Chuck	Radial Floating Amount	Symbol			
					A	B	C	L
RH-2076J6		1 ~ 7.5	Push-in Type	0.7	25	21	35	84
RH-50130J6		1.5 ~ 13	Push-in Type	1.1	42	34	55	121

Note: Other Reamer Holders not shown in the above chart can be supplied.
Please contact our local distributor or subsidiary for details.

TAPPER HEADS

Spindle Pitch Adjustable Type

Tapper Heads with adjustable center distances.



Sleeve Style





Sleeve Style

Dimensions (mm)

2TC-E1040AC
2TC-E3080AF

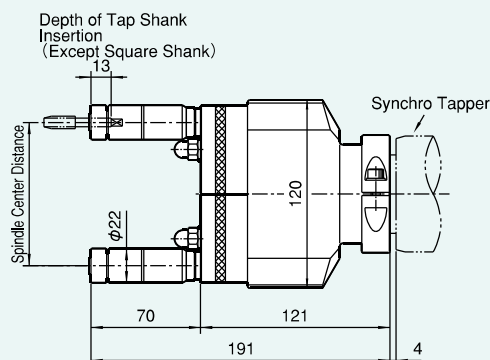

2TD-60120AF

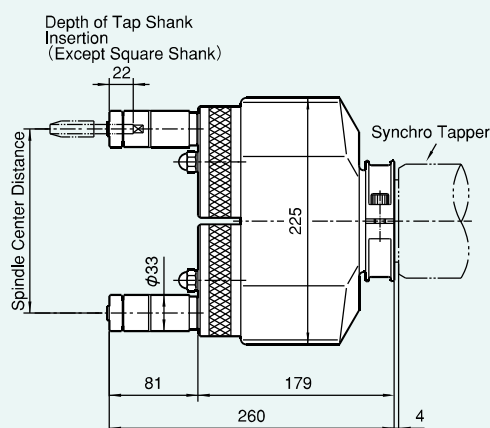

Tapping Capacity (mm)

Specs Model	Spindle Center Distance (Min.~Max.)	Chuck Capacity	Type of Tap Holding	Speed Ratio (Output/Input)	Tapping Capacity			Applicable Synchro Tapper		
					Aluminium	Cast Iron	Carbon Steel	Model	Revolution (min ⁻¹)	
2TC-E1040AC	23 ~ 91	M1 ~ M4	Centering	1	M4	M4	M4	STB-H108	50Hz	60Hz
2TC-E3080AF	23 ~ 91	M3 ~ M8	Floating *0.2	1	M4	M4	M4	STB-L108	1,200	1,440
					M6	M5	M4	STB-H108	920	1,100
					M6	M6	M5	STB-H108	750	900
					M5	M4	M4	STB-L108	520	620
					M6	M5	M5	STB-L108	920	1,100
					M8	M6	M6	STB-L108	580	690
					M8	M6	M6	STB-L108	350	420
2TD-60120AF	48.5 ~ 167	M6 ~ M12	Floating *0.4	1	M12	M8	M8	STC-P316	220	260
					M12	M10	M10	STC-P316	600	720
									400	490

Notes 1. The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 , Carbon Steel : S45C

2. Tapping capacities shown in the above chart are the value in case of using spiral tap or point tap and the tapping depth is up to 1.5 times of tap diameter.

3. The mark "*" stands for the radial floating volume. (diameter)

4. Other models of Synchro Tappers are applicable. Please contact our local distributor or subsidiary for the details.

Fixed Spindle Type


Sleeve Style • Collet Chuck Style

Sugino can provide Tapper Heads for your special requirements.

2-Spindle



Dimensions (mm)

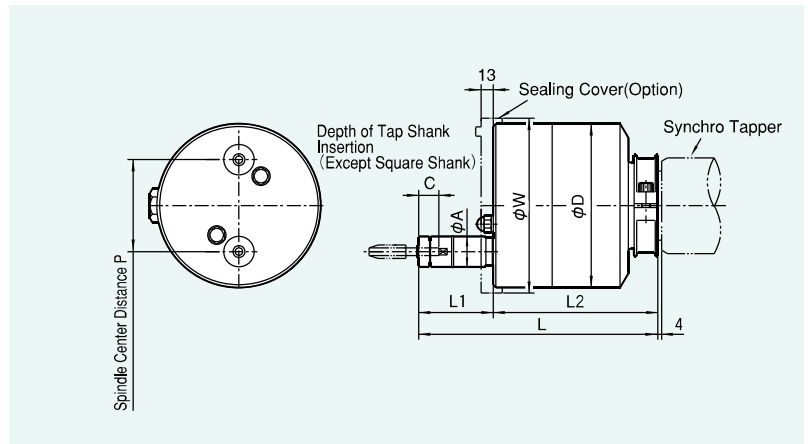

Dimensions (mm)

Model	Symbol	P	D	L	L1	L2	A	C	W
2TC-E1040TBFE		10 ~ 12	88	229,5	81,5	148	9,8	18,5	92
2TC-E1050TBFE		12 ~ 14	88	231	83	148	11,8	19	92
2TC-E1080TBFE		14 ~ 15	88	228	80	148	13,6	19	92
2TC-E1040BF		15 ~ 60	88	200,5	52,5	148	14,6	8	92
2TC-E3080BF		23 ~ 91	124	192	70	122	22	13	128
2TD-3080BF		23 ~ 29	138	241	70	171	22	13	142
		29 ~ 90	138	217		147			142
		90 ~ 130	178	217		147			182
2TD-60120BF		35 ~ 90	138	260	81	179	33	22	142
		90 ~ 123	178						182
2TD-80160BF		45 ~ 88	138	261	82	179	40	19	142
		88 ~ 121	178						182

Note: Heads with different spindle pitches not shown in the above chart can be manufactured. Please contact our local distributor or subsidiary for details.

Tapping Capacity (mm)

Model	Specs	Spindle Center Distance (Min.~Max.)	Chuck Capacity	Chuck Type	Type of Tap Holding	Tapping Capacity			Applicable Synchro Tapper		
						Aluminium	Cast Iron	Carbon Steel	Model	Revolution (min ⁻¹)	
2TC-E1040TBFE		10 ~ 12	M1 ~ M4	Collet Chuck	Centering	M2,5	M2	M2	STB-L108	—	—
2TC-E1050TBFE		12 ~ 14	M1 ~ M5	Collet Chuck	Centering	M3	M2,5	M2	STB-L108	—	—
2TC-E1080TBFE		14 ~ 15	M1 ~ M8	Collet Chuck	Centering	M3,5	M3	M2,5	STB-L108	—	—
2TC-E1040BF		15 ~ 60	M1 ~ M4	Sleeve	Centering	M4	M3	M3	STB-H108	1,200	1,440
2TC-E3080BF	23 ~ 91	M3 ~ M8	Sleeve	Floating *0,2		M6	M5	M4	STB-H108	920	1,100
						M6	M6	M5		750	900
						M5	M4	M4	STB-L108	520	620
						M6	M5	M5		920	1,100
						M8	M6	M6		580	690
						M8	M6	M6		350	420
2TD-3080BF	23 ~ 130	M3 ~ M8	Sleeve	Floating *0,2		M8	M6	M6	STC-P316	220	260
2TD-60120BF	35 ~ 123	M6 ~ M12	Sleeve	Floating *0,4		M12	M8	M8	STC-P316	600	720
2TD-80160BF	45 ~ 121	M8 ~ M16	Sleeve	Floating *0,4		M12	M10	M10		400	490
						M14	M10	M10	STC-P316	400	490
						M16	M12	M12		210	250


Notes1. The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 , Carbon Steel : S45C

2. Tapping capacities shown in the above chart are the value in case of using spiral tap or point tap and the tapping depth is up to 1.5 times of tap diameter.

3. The mark "*" stands for the radial floating volume. (diameter)

4. Other models of Synchro Tappers are applicable. Please contact our local distributor or subsidiary for the details.

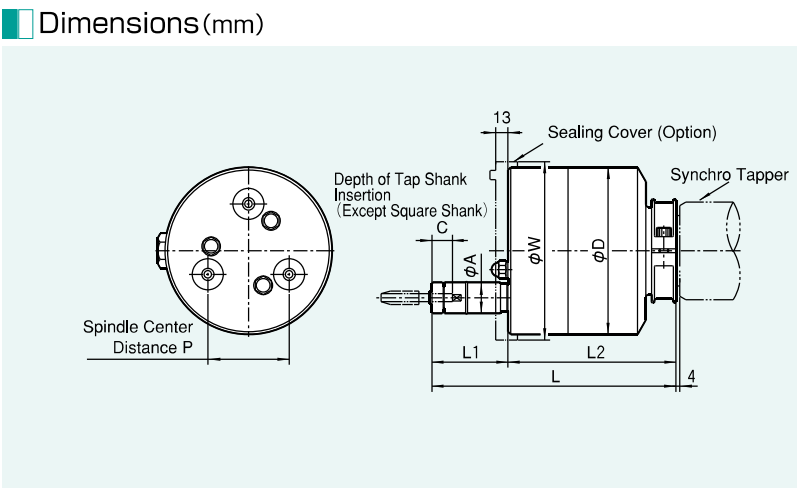

Dimensions(mm)

Model	Symbol	P	D	L	L1	L2	A	C	W
3TC-E1040TBFE		10 ~ 12	88	229.5	81.5	148	9.8	18.5	92
3TC-E1050TBFE		12 ~ 14	88	231	83	148	11.8	19	92
3TC-E1080TBFE		14 ~ 15	88	228	80	148	13.6	19	92
3TC-E1040BF		15 ~ 52	88	200.5	52.5	148	14.6	8	92
3TC-E3080BF		23 ~ 78	124	192	70	122	22	13	128
3TD-3080BF		29 ~ 80	138	217	70	147	22	13	142
		80 ~ 110	178						182
3TD-60120BF		35 ~ 78	138	260	81	179	33	22	142
		78~106	178						182

Note:Heads with different spindle pitches not shown in the above chart can be manufactured.
Please contact our local distributor or subsidiary for details.


Tapping Capacity (mm)

Model	Specs	Spindle Center Distance (Min.~Max.)	Chucking Capacity	Chuck Type	Type of Tap Holding	Tapping Capacity			Applicable Syncro Tapper	
						Aluminium	Cast Iron	Carbon Steel	Model	Revolution (min ⁻¹) 50Hz 60Hz
3TC-E1040TBFE		10 ~ 12	M1 ~ M4	Collet Chuck	Centering	M2.5	M2	M2	STB-L108	— —
3TC-E1050TBFE		12 ~ 14	M1 ~ M5	Collet Chuck	Centering	M3	M2.5	M2	STB-L108	— —
3TC-E1080TBFE		14 ~ 15	M1 ~ M8	Collet Chuck	Centering	M3.5	M3	M2.5	STB-L108	— —
3TC-E1040BF	15 ~ 52	M1 ~ M4	Sleeve	Centering		M4	M3	M3	STB-H108	1,200 1,440
						M4	M3	M3		750 900
						M4	M3	M3	STB-L108	920 1,100
						M4	M3	M3		580 690
3TC-E3080BF	23 ~ 78	M3 ~ M8	Sleeve	Floating *0.2		M5	M4	M3	STB-H108	750 900
						M6	M5	M4		520 620
						M4	M3	M3	STB-L108	920 1,100
						M5	M4	M4		580 690
						M6	M5	M5		350 420
						M8	M6	M6		220 260
3TD-3080BF	29 ~ 110	M3 ~ M8	Sleeve	Floating *0.2		M8	M6	M6	STC-P316	600 720
3TD-60120BF	35 ~ 106	M6 ~ M12	Sleeve	Floating *0.4		M10	M6	M6	STC-P316	600 720
						M12	M8	M8		400 490
						M12	M10	M10		210 250


Notes1.The materials quoted are equivalent to following JIS code.
Aluminium : ADC , Cast Iron : FC200 ,Carbon Steel : S45C
2.Tapping capacities shown in the above chart are the value in case of using spiral tap or point tap and the tapping depth is up to 1.5 times of tap diameter.
3.The mark "*" stands for the radial floating volume. (diameter)
4.Other models of Syncro Tappers are applicable. Please contact our local distributor or subsidiary for details.

Sleeve Style , Collet Chuck Style

4-Spindle

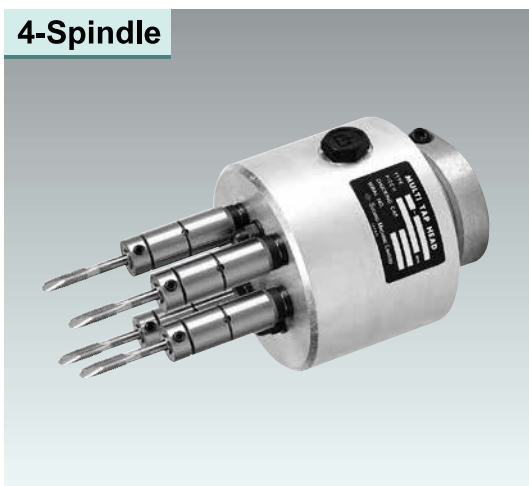

Dimensions(mm)

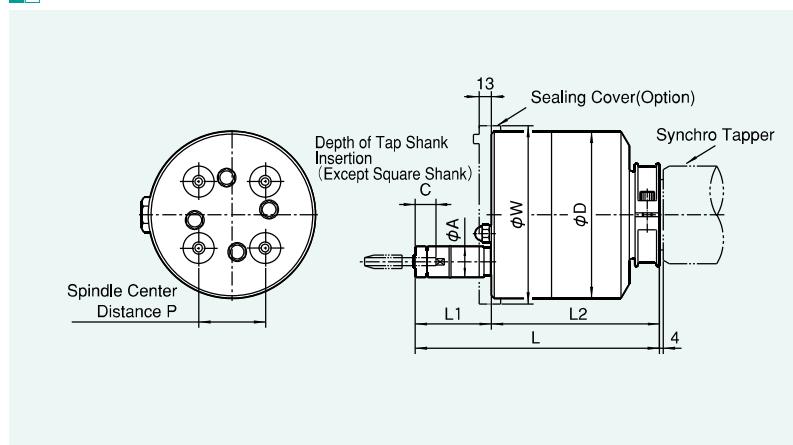

Dimensions(mm)

Model	Symbol	P	D	L	L1	L2	A	C	W
4TC-E1050TBFE		12 ~ 14	88	231	83	148	11.8	19	92
4TC-E1080TBFE		14 ~ 15	88	228	80	148	13.6	19	92
4TC-E1040BF		15 ~ 64	124	174.5	52.5	122	14.6	8	128
4TC-E3080BF		23 ~ 64	124	192	70	122	22	13	128
4TD-3080BF		29 ~ 66	138	217	70	147	22	13	142
		66 ~ 93	178						182
4TD-60120BF		35 ~ 86	178	260	81	179	33	22	182

Note: Heads with different spindle pitches or five or more spindle heads are manufactured.
Please contact our local distributor or subsidiary for details.

Tapping Capacity(mm)

Model	Specs	Spindle Center Distance (Min.~Max.)	Chuck Type	Type of Tap Holding	Tapping Capacity			Applicable Synchro Tapper		
					Aluminium	Cast Iron	Carbon Steel	Model	Revolution (min ⁻¹)	
4TC-E1050TBFE		12 ~ 14	Collet Chuck	Centering	M3	M2.5	M2	STB-L108	—	—
4TC-E1080TBFE		14 ~ 15	Collet Chuck	Centering	M3.5	M3	M2	STB-L108	—	—
4TC-E1040BF	15 ~ 64	M1 ~ M4	Sleeve	Centering	M4	M3	M2	STB-H108	1,200	1,440
					M4	M3	M3		750	900
					M4	M3	M3	STB-L108	520	620
					M4	M3	M2		920	1,100
					M4	M3	M3	STB-H108	580	690
4TC-E3080BF	23 ~ 64	M3 ~ M8	Sleeve	Floating *0.2	M5	M4	M4	STB-L108	520	620
					M5	M4	M3		580	690
					M5	M5	M4	STB-L108	350	420
					M6	M6	M5		220	260
					M8	M5	M5	STC-P316	600	720
4TD-3080BF	29 ~ 93	M3 ~ M8	Sleeve	Floating *0.2	M8	M6	M6	STC-P316	400	490
					M10	M6	M6		400	490
4TD-60120BF	35 ~ 86	M6 ~ M12	Sleeve	Floating *0.4	M12	M8	M8	STC-P316	210	250

Notes1. The materials quoted are equivalent to following JIS code.

Aluminium : ADC , Cast Iron : FC200 , Carbon Steel : S45C

2. Tapping capacities shown in the above chart are the value in case of using spiral tap or point tap and the tapping depth is up to 1.5 times of tap diameter.


3. The mark "*" stands for the radial floating volume. (diameter)

4. Other models of Synchro Tappers are applicable. Please contact our local distributor or subsidiary for details.

Fixed Spindle Type

Adjustable Spindle Nose Style

Tapper Heads with adjustable Spindle Nose for adjustable adapter.

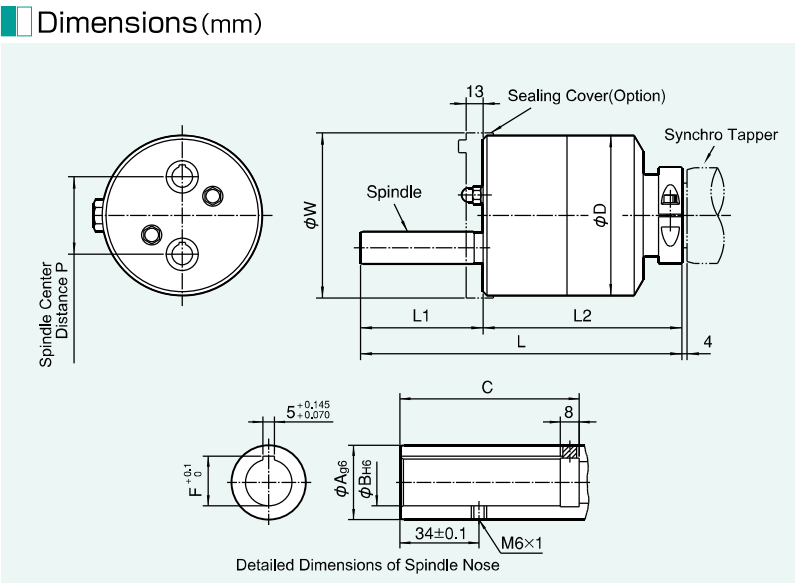

Dimensions (mm)													
Symbol Model	Applicable Adapter	P	D	L	L1	L2	A	B	C	F	W	Applicable tapping chuck (Made by NT Tool)	
2TC—EAM1E	BILZ16	26 ~ 82	124	249	95	154	25	16	74	17.3	128	WFLP030—0/Tr.16×1.5	
	BILZ20	34 ~ 78	124	254	100	154	32	20	77	21.3	128	WFLP32.40—0/Tr.20×2	
2TD—AM1E	BILZ16	26 ~ 94	138	274	95	179	25	16	74	17.3	142	WFLP030—0/Tr.16×1.5	
		94 ~ 129	178								182		
	BILZ20	34 ~ 90	138	279	100	179	32	20	77	21.3	142	WFLP32.40—0/Tr.20×2	
		90 ~ 125	178								182		

Note: Heads with any Spindle pitches other than mentioned above, or ones with specific Spindle Noses for Holders from various manufacturers can be supplied upon request.
Please contact our distributor or subsidiary for the details.

Adjustable Spindle Nose Style




Motor Directly Connected 6-Spindle Head

3-Spindle



■ Dimensions (mm)

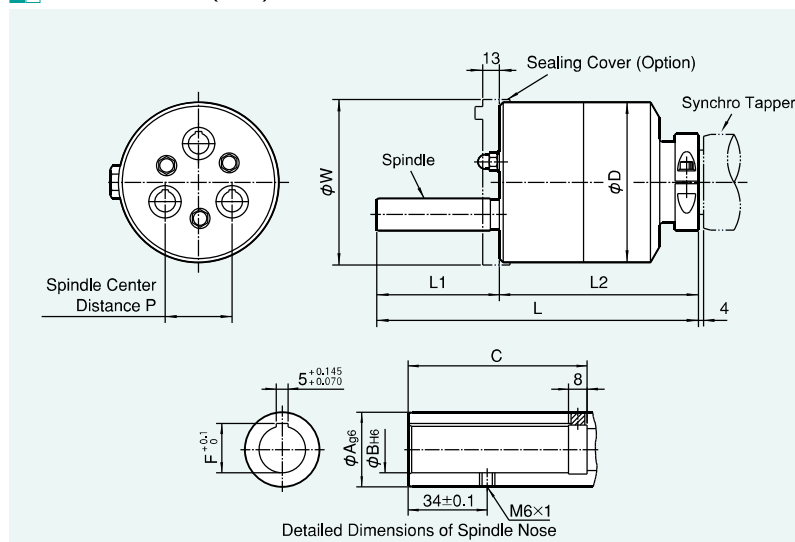

■ Dimensions (mm)


Model	Symbol	Applicable Adapter	P	D	L	L1	L2	A	B	C	F	W	Applicable Tapping Chuck (Made by NT Tool)
3TC-EAM1E		BILZ16	26 ~ 71	124	249	95	154	25	16	74	17.3	128	WFLP030-0/Tr.16×1.5
		BILZ20	34 ~ 67	124	254	100	154	32	20	77	21.3	128	WFLP32.40-0/Tr.20×2
3TD-AM1E		BILZ16	26 ~ 81	138	274	95	179	25	16	74	17.3	142	WFLP030-0/Tr.16×1.5
			81 ~ 111	178								182	
		BILZ20	34 ~ 78	138	279	100	179	32	20	77	21.3	142	WFLP32.40-0/Tr.20×2
			78 ~ 108	178								182	

Note: Heads with any Spindle pitches other than mentioned above, or ones with specific Spindle Noses for Holders from various manufacturers can be supplied upon request.
Please contact our distributor or subsidiary for the details.

4-Spindle



■ Dimensions (mm)

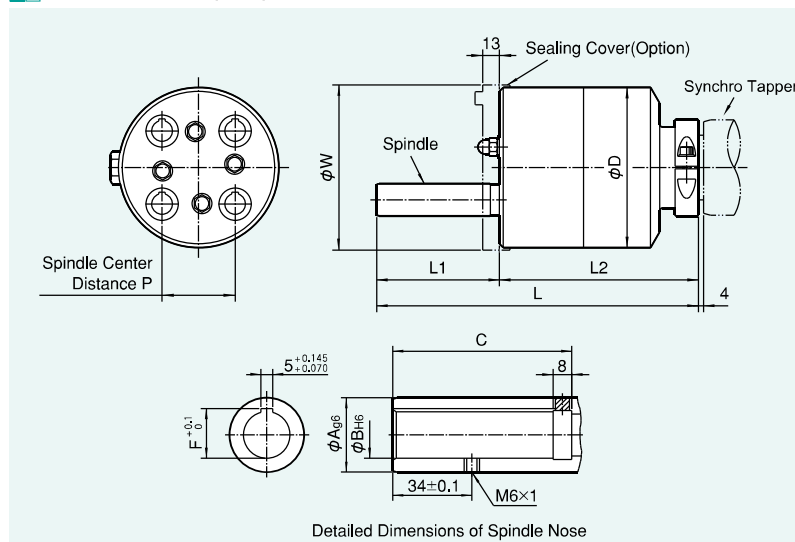

■ Dimensions (mm)



Model	Symbol	Applicable Adapter	P	D	L	L1	L2	A	B	C	F	W	Applicable Tapping Chuck (Made by NT Tool)
4TD-AM1E		BILZ16	26 ~ 91	178	274	95	179	25	16	74	17.3	182	WFLP030-0/Tr.16×1.5
		BILZ20	34 ~ 88	178	279	100	179	32	20	77	21.3	182	WFLP32.40-0/Tr.20×2

Note: Heads with any spindle pitches other than mentioned above, or ones with five or more spindles can be manufactured.
Please contact our distributor or subsidiary for the details.

Quick Change "Catch-Clip" Type

Sleeve Style • Collet Chuck Style

Tapper Head with a head body easily detachable in a single motion, improving productivity with minimized machine idle time.

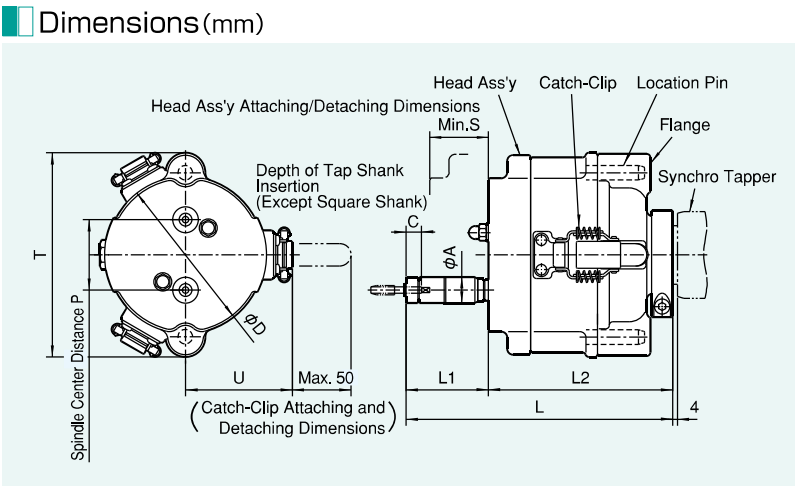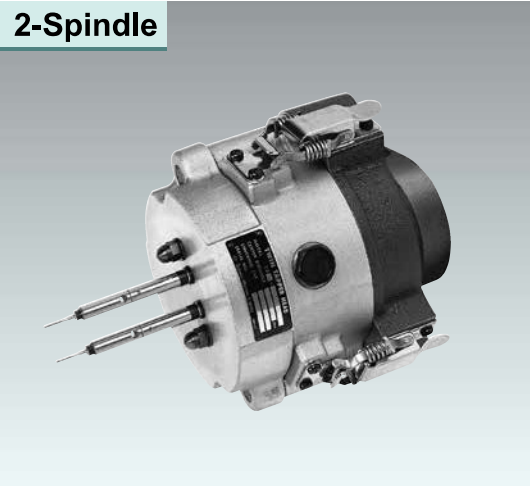

Dimensions (mm)


Model	Symbol	P	D	L	L1	L2	A	C	S	T	U
2TC-E1050TCFE		12 ~ 14	134	240	83	157	11,8	19	55	174	91
2TC-E1080TCFE		14 ~ 15	134	237	80	157	13,6	19	55	174	91
2TC-E1040CF		15 ~ 91	134	209,5	52,5	157	14,6	8	55	174	91
2TC-E3080CF		23 ~ 91	134	227	70	157	22	13	55	174	91
2TD-3080CF		23 ~ 130	192	269	70	199	22	13	65	254	116
2TD-60120CF		35 ~ 123	192	312	81	231	33	22	65	254	116

Note: Heads with different spindle pitches not shown in the above chart can be manufactured. Please contact our local distributor or subsidiary for details.

Sleeve style , Collet Chuck Style




7-Spindle Tapper Head

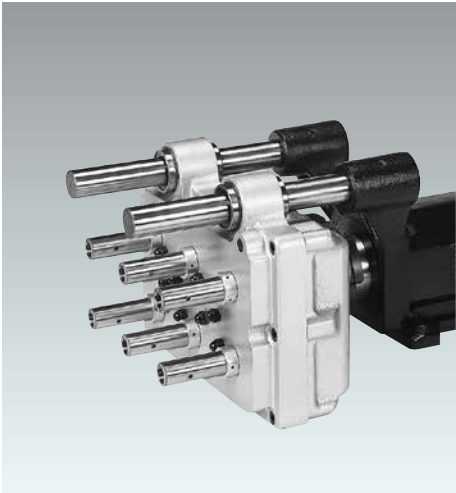


6-Spindle Head with Guide Bars

3-Spindle

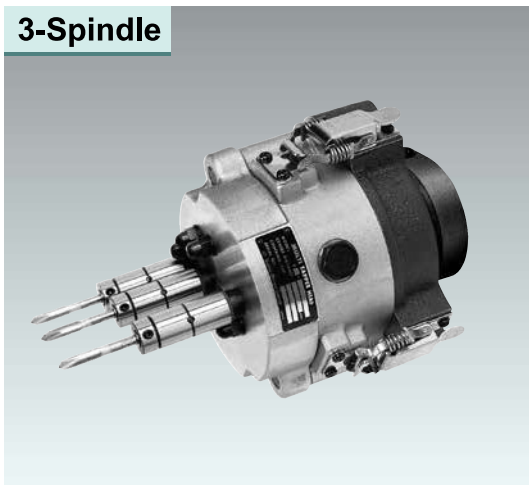

Dimensions(mm)

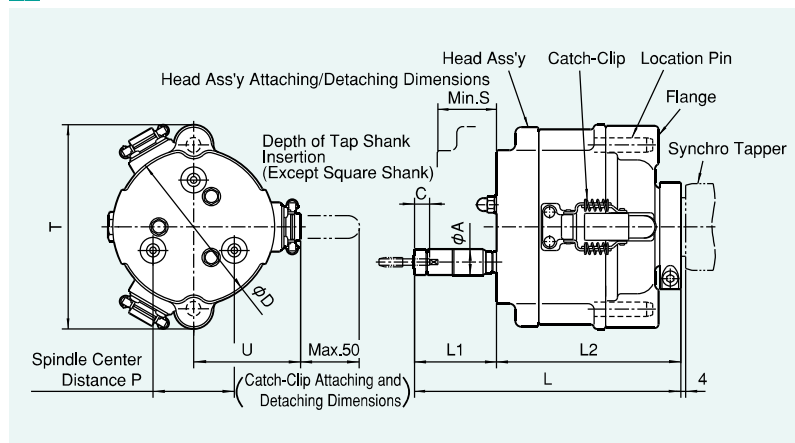


Dimensions(mm)


Model	Symbol	P	D	L	L1	L2	A	C	S	T	U
3TC-E1050TCFE		12 ~ 14	134	240	83	157	11.8	19	55	174	91
3TC-E1080TCFE		14 ~ 15	134	237	80	157	13.6	19	55	174	91
3TC-E1040CF		15 ~ 78	134	209.5	52.5	157	14.6	8	55	174	91
3TC-E3080CF		23 ~ 78	134	227	70	157	22	13	55	174	91
3TD-3080CF		29 ~ 110	192	269	70	199	22	13	65	254	116
3TD-60120CF		35 ~ 106	192	312	81	231	33	22	65	254	116

Note: Heads with different spindle pitches not shown in the above chart can be manufactured. Please contact our local distributor or subsidiary for details.

4-Spindle

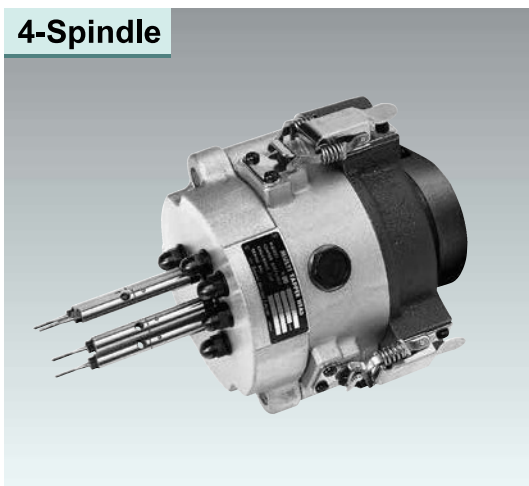

Dimensions(mm)

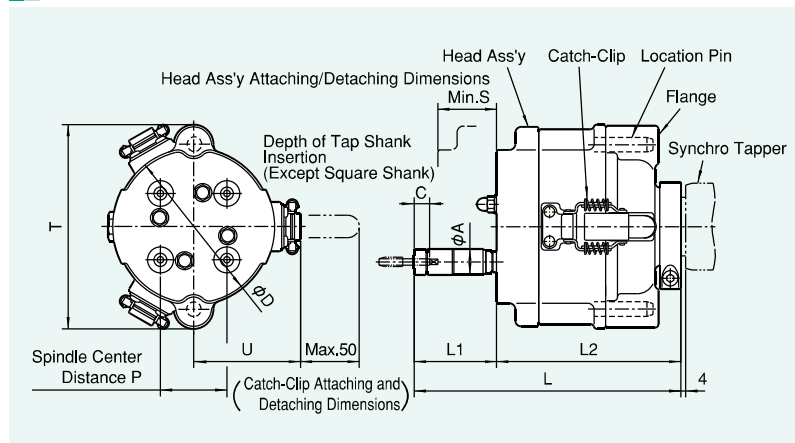

Dimensions(mm)


Model	Symbol	P	D	L	L1	L2	A	C	S	T	U
4TC-E1050TCFE		12 ~ 14	134	240	83	157	11.8	19	55	174	91
4TC-E1080TCFE		14 ~ 15	134	237	80	157	13.6	19	55	174	91
4TC-E1040CF		15 ~ 64	134	209.5	52.5	157	14.6	8	55	174	91
4TC-E3080CF		23 ~ 64	134	227	70	157	22	13	55	174	91
4TD-3080CF		29 ~ 93	192	269	70	199	22	13	65	254	116
4TD-60120CF		35 ~ 86	192	312	81	231	33	22	65	254	116

Note: Heads with any spindle pitches other than mentioned above, or ones with five or more spindles can be manufactured. Please contact our distributor or subsidiary for the details.

Quick Change "Catch-Clip" Type

Adjustable Spindle Nose Style

"Catch-Clip" Tapper Heads with adjustable Spindle Nose for adjustable adapter.

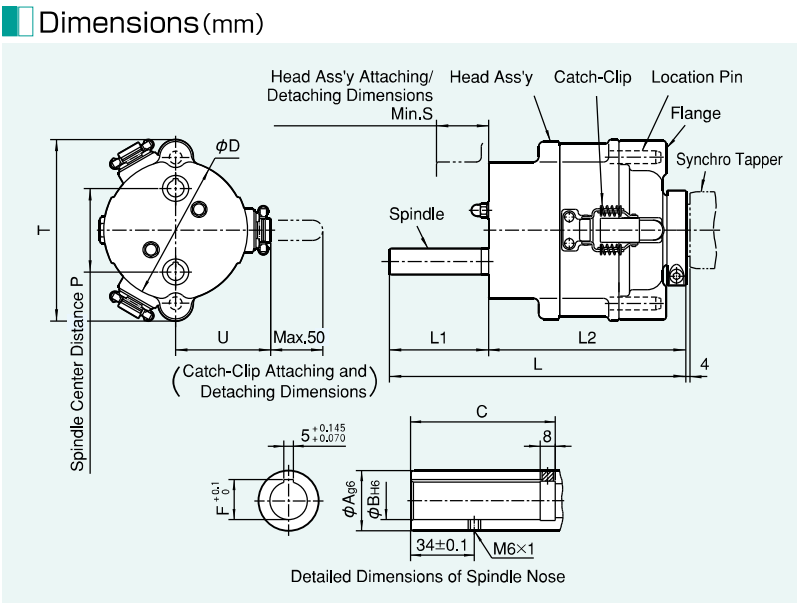

Dimensions (mm)


Symbol Model	Applicable Adapter	P	D	L	L1	L2	A	B	C	F	S	T	U	Applicable Tapping Chuck (made by NT Tool)
2TC-EAM1CE	BILZ16	26 ~ 82	134	284	95	189	25	16	74	17.3	55	174	91	WFLP030-0/Tr.16×1,5
	BILZ20	34 ~ 78	134	289	100	189	32	20	77	21.3	55	174	91	WFLP32.40-0/Tr.20×2
2TD-AM1CE	BILZ16	26 ~ 129	192	326	95	231	25	16	74	17.3	65	254	116	WFLP030-0/Tr.16×1,5
	BILZ20	34 ~ 125	192	331	100	231	32	20	77	21.3	65	254	116	WFLP32.40-0/Tr.20×2

Note: Heads with any Spindle pitches other than mentioned above, or ones with specific Spindle Noses for
Holders from various manufacturers can be supplied upon request.
Please contact our distributor or subsidiary for the details.

3-Spindle



Dimensions(mm)

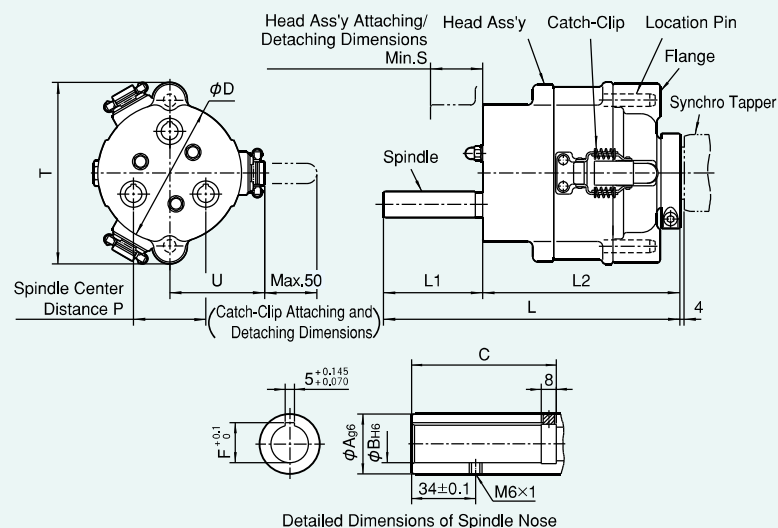

Dimensions(mm)


Model	Symbol	Applicable Adapter	P	D	L	L1	L2	A	B	C	F	S	T	U	Applicable Tapping Chuck (made by NT Tool)
3TC-EAM1CE		BILZ16	26 ~ 71	134	284	95	189	25	16	74	17.3	55	174	91	WFLP030-0/Tr.16×1.5
		BILZ20	34 ~ 67	134	289	100	189	32	20	77	21.3	55	174	91	WFLP32.40-0/Tr.20×2
3TD-AM1CE		BILZ16	26 ~ 111	192	326	95	231	25	16	74	17.3	65	254	116	WFLP030-0/Tr.16×1.5
		BILZ20	34 ~ 108	192	331	100	231	32	20	77	21.3	65	254	116	WFLP32.40-0/Tr.20×2

Note: Heads with any Spindle pitches other than mentioned above, or ones with specific Spindle Noses for Holders from various manufacturers can be supplied upon request.
Please contact our distributor or subsidiary for the details.

4-Spindle



Dimensions(mm)

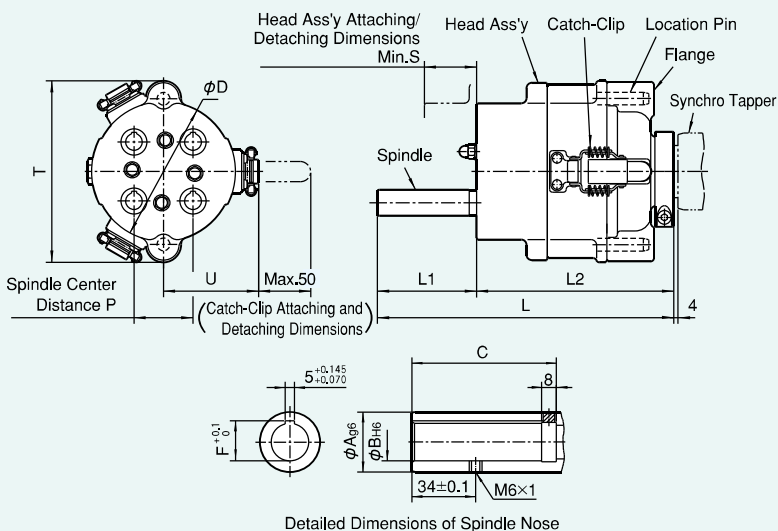

Dimensions(mm)

Model	Symbol	Applicable Adapter	P	D	L	L1	L2	A	B	C	F	S	T	U	Applicable Tapping Chuck (made by NT Tool)
4TD-AM1CE		BILZ16	26 ~ 91	192	326	95	231	25	16	74	17.3	65	254	116	WFLP030-0/Tr.16×1.5
		BILZ20	34 ~ 88	192	331	100	231	32	20	77	21.3	65	254	116	WFLP32.40-0/Tr.20×2

Note: Heads with any spindle pitches other than mentioned above, or ones with five or more spindles can be manufactured.
Please contact our distributor or subsidiary for the details.

Offset Fixed Type


Tapper Heads to avoid interference between Tapping Unit and Jig Fixture or work pieces.

Sleeve Style




Dimensions (mm)


OTC-100F

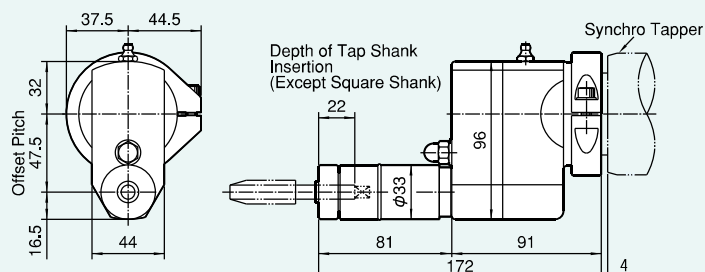

OTD-160F

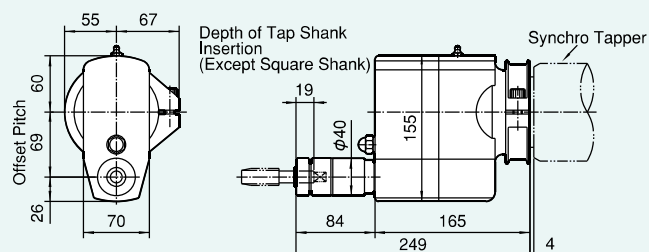

OTD-220F

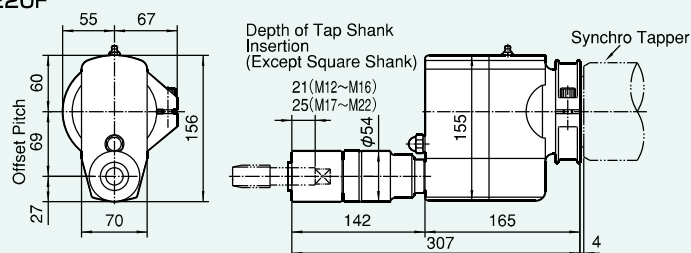

Tapping Capacity (mm)

Model	Specs	Offset Pitch	Chuck Capacity	Type of Tap Holding	Speed Ratio (Output/Input)	Applicable Synchro Tapper Model
OTC-100F		47.5	M3 ~ M12	Floating *0.4	1	STB-L108
OTD-160F		69	M3 ~ M16	Floating *0.4	1	STC-P316
OTD-220F		69	M12 ~ M22	Floating *0.4	1	STC-P316

Notes 1. The mark "*" stands for the radial floating volume. (diameter)
2. Offset heads not shown above chart are available. Please contact our local distributor or subsidiary for details.


Tap Holders

Head Holder exclusively used for tapping.
Four models available for different type sizes.




Dimensions (mm)

1TC-570RFC

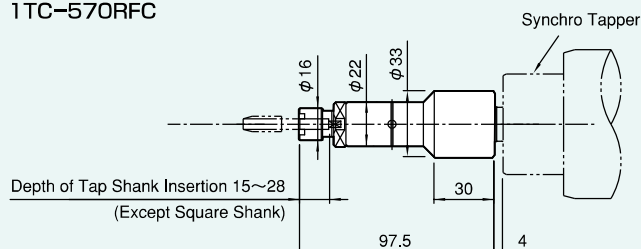

1TC-100C 1TC-100F 1TD-160F 1TD-220F

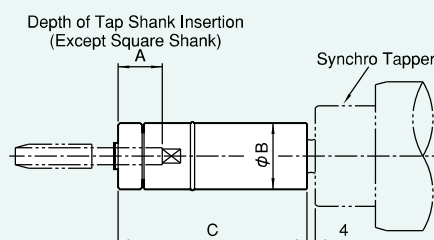

Tapping Capacity (mm)

Model	Specs	Chucking Capacity	Type of Tap Holding	Applicable Synchro Tapper Model
1TC-570RFC		M 1 ~ M3	Centering	STB-H108
1TC-100C		M3 ~ M12	Centering	STB-H108
1TC-100F		M3 ~ M12	Floating *0.4	STB-L108
1TD-160F		M3 ~ M16	Floating *0.4	STC-P316
1TD-220F		M12 ~ M22	Floating *0.4	STC-P316

Dimensions (mm)

Model	Symbol	A	B	C
1TC-100C		22	33	94
1TC-100F		22	33	94
1TD-160F		19	40	95
1TD-220F		21 (M12~M16) 25 (M17~M22)	54	109


Notes1. The mark "*" stands for the radial floating volume. (diameter)
2. Tap holder not shown above chart is available. Please contact our local distributor or subsidiary for details.
3. For speed of over 1,200min⁻¹, 1TC-570RFC or 1TC-100C is recommended.

Coolant Holder

Coolant Holder for oil hole drilling. High-speed deep drilling is realized with high pressure coolant.




Dimensions (mm)

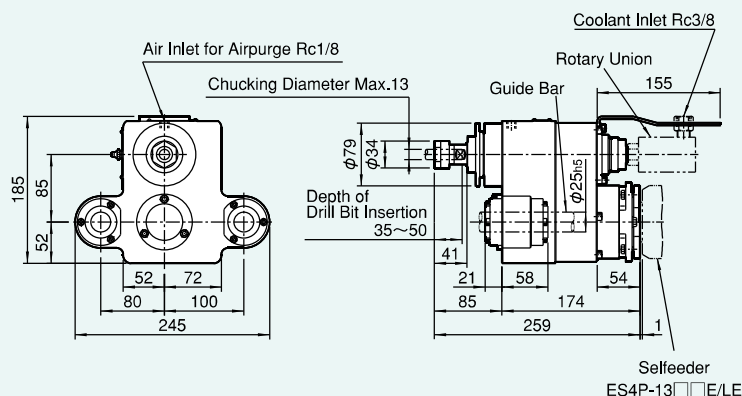


- Notes 1.Speed ratio 1.37(Output/Input)
2.Must be used at rotation speed of 10,000min⁻¹ or coolant pressure of 6.8MPa or less.
3.Guide bar is user's option.

Milling Head

Head for metal saw cutting or grooving. Special version with Guide Bars is also available.

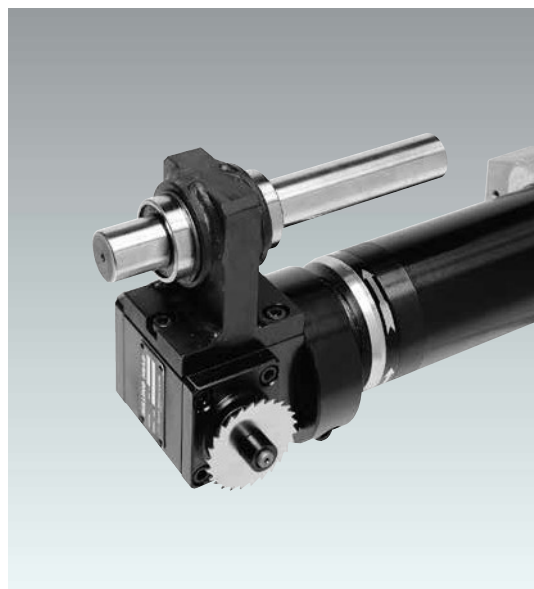

Dimensions (mm)

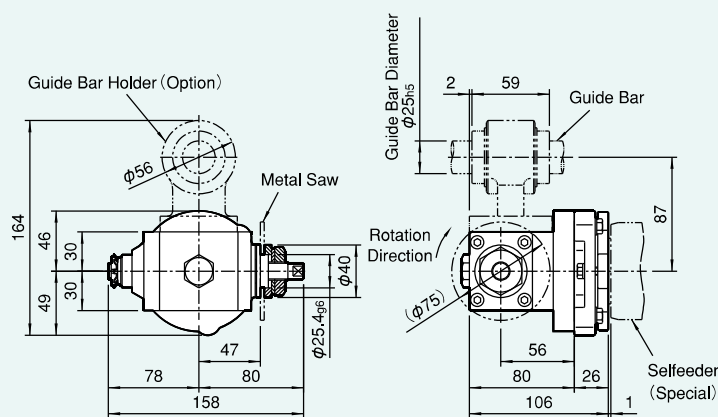

- Notes 1.Guide bar and metal saw are to be provided by user.
2.Spindle shape of Selffeeder is special.
3.Other models are also applicable. Please contact our distributor or our subsidiary for the details.

INQUIRY SHEET FOR MULTI-SPINDLE DRILLING,TAPPING HEADS

INQ. No.

Date

Company Name

Name

Phone

Fax

E-mail Address

* To ensure the proper design for your fixed type multi-spindle heads, please provide the following technical information for all quotation request and orders.

- | | | | | | |
|----------------------|---|---|-----------------------------|---|--------------------|
| 1. Workpiece | : | _____ | 2. Material and Hardness | : | _____ |
| 3. Kind of Coolant | : | _____ | 4. Actual Machining Time/pc | : | _____ |
| 5. Type of Head | : | ☐ Fixed ☐ Catch-clip | 6. Voltage | : | _____ V × _____ Hz |
| 7. Working Direction | : | ☐ Vertical Down ☐ Slant Down ☐ Horizontal ☐ Vertical Up ☐ Slant Up | | | |

Specific Information		Drilling	Tapping	Others ()
1	Hole (Tap) Dia. × Depth			
2	Pre-hole Dia. × Depth			
3	Tap Pitch & Standard			
4	Required Unit Stroke	(Total)	(Total)	(Total)
5	Type of Tool	Straight Shank Morse Taper Shank (No.)	Hand, Spiral, Point, Roll Shank Size Dia.X Sq.	
6	Tool (Material)	HSS, carbide, etc ()	HSS, carbide, etc ()	HSS, carbide, etc ()
7	Necessity of Adjustable Adapter	BILZ (16,20,25) , No Use Others ()	BILZ (16,20,25), No Use Others ()	BILZ (16,20,25), No Use Others ()
8	Water Proof of Spindle	Use / No Use	Use / No Use	Use / No Use
9	Requested Driving Unit	Model:	Model:	Model:

Hole Pattern: Please describe the exact hole dia., position, size and their tolerance below.

* Mark center position of the head on this sketch if required to follow.

Please also attach drawing with indication of the portion to be machined, if necessary.

Remarks:




Sugino Selffeeders, designed and manufactured with latest technology, meets high speed processing requirements while maintaining high accuracies. We provide the highest quality Selffeeders to meet your specific requirements.

Selffeeder Global



High precision and high-rigidity Foot-Mount type Drilling Unit equipped with a general-purpose motor with high-performance and high-power, as the Spindle Motor, has broad lineup from low-speed type to high-speed type.

Selffeeder Electric

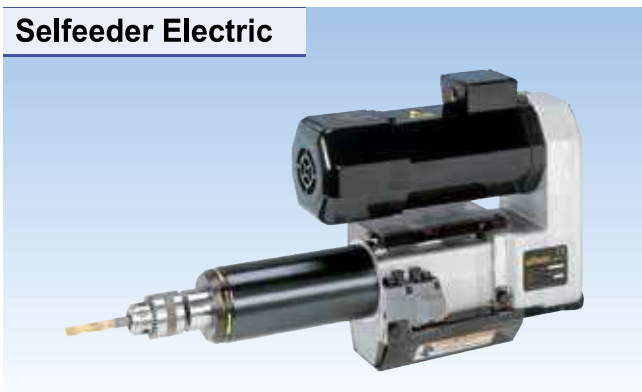

A cost effective Drilling Unit combining pneumatic thrust hydraulically checked with many powerful horsepower motor options. Appropriate units can be selected according to machining specification capacity charts.



Sugino Synchro Tappers are mechanical feed tapping units that meet high speed tapping and integrated automation requirements. Feed rates are synchronized with tool rotation, therefore very thin or soft materials can be tapped efficiently. (capable of class 3 thread accuracy)

Model : STB-H/L



Compact and light, allows flexible set-ups. High speed (H Type) and high torque (L Type) units are available.

Model : STC-P



This Tapping Unit has 120mm total stroke. Large single spindle capacity with increased efficiency by attaching a Multiple Spindle Head for tapping more holes simultaneously.



SUGINO MACHINE LIMITED

<http://www.sugino.com>

1-9-13, Nihonbashi-Honcho, Chuo-ku, Tokyo, 103-0023 JAPAN

☎+81-3-5201-5973 FAX +81-3-5201-5978

e-mail : export@sugino.com

Overseas Office

U.S.A.	Sugino Corp.	[Chicago]	☎ +1-630-250-8585	FAX +1-630-250-8665	e-mail : mach@suginocorp.com
		[Michigan]	☎ +1-630-250-8585	FAX +1-630-250-8665	
Mexico	Sugino Machine Mexico, S.A. de C.V.	[Monterrey]	☎ +52-81-1100-0108		e-mail : ventas@sugino.com.mx
		[Aguascalientes]	☎ +52-449-140-7495		
Czech Rep.	Sugino Machine Limited Prague Branch Office		☎ +420-257-950-228	FAX +420-257-950-044	e-mail : info@sugino.cz
France	Sugino Machine France S.A.S.		☎ +33-1-84-17-49-87	FAX +33-1-84-17-58-86	e-mail : contact@sugino.eu
China	Sugino Shanghai Co., Ltd.	[Shanghai]	☎ +86-21-5385-5031	FAX +86-21-5385-5032	e-mail : sh@sugino.cn
		[Guangzhou]	☎ +86-20-8363-4719	FAX +86-20-8363-4992	
		[Tianjin]	☎ +86-22-5879-1321	FAX +86-22-5879-1322	
India	Sugino Machine India Pvt. Ltd.		☎ +91-124-483-1900		e-mail : contact@sugino.co.in
Thailand	Sugino Machine (Thailand) Ltd.		☎ +66-3572-9351	FAX +66-3572-9355	e-mail : contact@sugino.th.com
Singapore	Sugino Machine Singapore Pte. Ltd.		☎ +65-6458-9544	FAX +65-6456-7789	e-mail : sales@sugino-singapore.com.sg
Indonesia	PT Sugino Machine Indonesia		☎ +62-21-2949-6235	FAX +62-21-2949-6236	e-mail : contact@sugino.co.id
Overseas Manufacturing Plant					
China	Sugino Changshu Co., Ltd.		☎ +86-512-8158-1111	FAX +86-512-8158-1112	
Overseas Group Company					
Germany	Zippel GmbH		☎ +49-9401-9210-0	FAX +49-9401-9210-25	e-mail : info@zippel.com

■ Specifications in this catalogue are subject to change without prior notice for further improvement.

■ This product and other related technology (include the program) are subject to the terms and conditions of the relevant foreign trade acts depending on end users and their applications.

All the relevant forms must be submitted to the Japanese government, including the application to export technology.

■ The content of this catalogue is as of November 2015.

■ Any unauthorized use, copying or reprinting of the contents or part thereof in this catalogue is prohibited.